



BSI Technical Guideline TR-03121-2

Biometrics for Public Sector Applications

Part 2: Software Architecture

Volume 2: High Level Biometric Services

Version 5.2



Federal Office for Information Security
P.O. Box 20 03 63
53133 Bonn
E-Mail: TRBiometrics@bsi.bund.de
Internet: <https://bsi.bund.de>
© Federal Office for Information Security 2021

Table of Contents

1.	Introduction	1
1.1.	Motivation	1
2.	Architecture for Biometric Applications	2
2.1.	Client-Server Architecture	2
3.	Document Overview	4
3.1.	Terminology	4
3.2.	Naming Conventions	4
3.3.	Namespaces	5
3.4.	XML Schema and Web Service Definition	5
3.5.	Interoperability	5
4.	Interface Overview	6
4.1.	High-Level Biometric Services	6
4.2.	Error Handling	6
5.	High Level Biometric Services API	7
5.1.	Namespaces	7
5.2.	Data Types	7
5.3.	Fault Types	23
5.4.	Operations	27
5.5.	Service-Device Description Schema	36
6.	Example (Non-Normative)	63
6.1.	Service-Device Description	63
7.	Client-Server Connection Scenarios	65
7.1.	Connection via TCP/IP	65
7.2.	Connection via USB	66
8.	Service Definitions	67
8.1.	Service Definition Facial Image Acquisition System	67
8.2.	Service Definition Basic Facial Image Acquisition System	74
8.3.	Service Definition Fingerprint Acquisition	79
8.4.	Service Definition for Self-Service System	83
	List of Abbreviations	90
	Bibliography	91

List of Figures

2.1. Client-Side Process	3
7.1. HLBS Architecture	65
7.2. Architecture via TCP/IP	65
7.3. Architecture via USB	66

1. Introduction

This Technical Guideline specifies a web service that provides a high level interface for executing and visualising biometric services.

1.1. Motivation

The BSI TR-03121-3 defines workflows for some standard scenarios in public sector applications. Due to limitations of Biometric Application Programming Interface (BioAPI) 2.0, the graphical user interfaces (GUIs) for these workflows are usually implemented directly in the Biometric Service Providers (BSPs), which make a seamless integration into the application impossible. BioAPI 2.1 introduces so called BioGUI callbacks, which allow the transfer of process information (e.g. live images, process states, ...) but implementing these callbacks in the application proved to be very tedious.

The goal of this document is to provide a high-level webservice interface that reduces the programming effort to integrate the visualisation of status information and the interaction with biometric workflows into applications. The interface is explicitly designed to be independent of the BioAPI standard in terms of terminology and functionality so that webservice implementations are not bound to the BioAPI standard.

2. Architecture for Biometric Applications

2.1. Client-Server Architecture


To separate responsibilities and increase flexibility, a client-server approach is introduced in this Technical Guideline. While the server side is responsible for implementing the specific biometric workflow and the communication with biometric devices, the client side is responsible for displaying the workflow feedback and providing possibilities for the user to interact with the service. The client does not need to care about the exact process behind a service, so that there is a clear separation between user interface and workflow. This allows a very flexible and seamless integration of the same biometric process into different applications.

In this Technical Guideline the term "biometric service" refers to the general process to accomplish a certain biometric task. For example one such process for fingerprint enrolment could be to capture the fingerprints, do quality computations and repeat the capturing up to three times if the quality criteria are not met. It is important to note that these processes can greatly be influenced by the available biometric devices. If a 4-finger scanner is available, the process to capture the fingerprints would be a standard 4-4-2 approach. If only a 1-finger scanner is available each finger has to be captured separately. So, although the general process stays the same, details can change depending on the used device. This is why in the following we need to select service-device-combinations instead of only selecting services. Of course, it is possible though that some services do not need devices at all (e.g. a simple face image comparison service), so the device-selection might be optional for some services.

The server provides a list of service-device-descriptions out of which the client can choose the one that is most appropriate for him. Each description is detailed enough to provide enough information for the application programmer in order to design its user interface without knowing the exact logic behind the process. The description is standardized through an XML schema so that the application can even analyse the description to automatically adjust the user interface.

Each service allows interaction with so called user commands. In the feedback loop the service provides information about which user commands are allowed to be signalled at the moment and which are not. The application can reflect that by enabling/disabling the corresponding buttons for example.

After the service execution has finished, one or more results can be retrieved from the service. The service description lists all generated results so that the application knows beforehand which results can be expected.

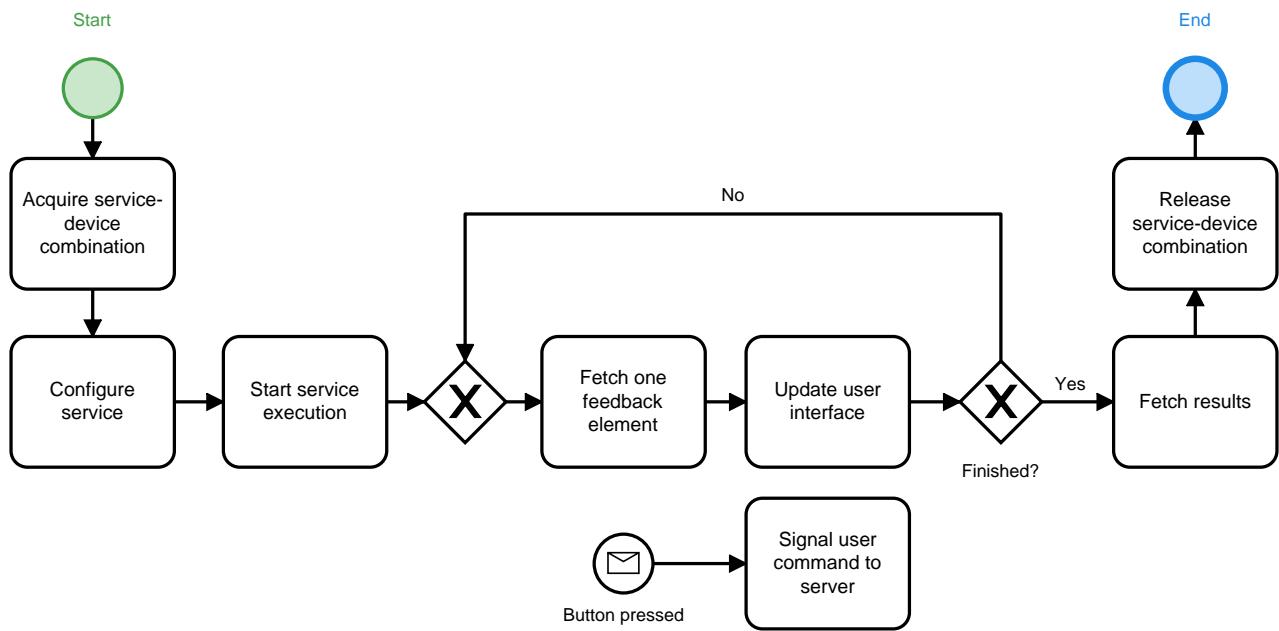**Figure 2.1.** Client-Side Process

► Figure 2.1 visualises the service execution process from the client side. After a service-device-combination is reserved for use, it can be configured and started. The client processes the service feedback in a loop and updates the user interface accordingly. If a user command should be signalled (e.g. because the user clicked a button), the client sends an appropriate message to the server. After the service execution has finished, the client fetches the results and releases the acquired service-device-combination.

3. Document Overview

3.1. Terminology

The key words "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BIB_RFC2119].

3.2. Naming Conventions

3.2.1. Multiplicity

Generally, XML elements and attributes listed in this document are required, i.e. the respective parent element SHALL contain exactly one such element. Elements and attributes that deviate from this baseline are denoted in this document by a symbol which is appended to the element/attribute name. The symbols are listed in ▶Table 3.1.

Appended Symbol	Meaning
?	Zero or one
*	Zero or more
+	One or more

Table 3.1 Multiplicity Symbols

3.2.2. SOAP Interfaces

All operations of this interface follow the request/response model, i.e., communication is initiated by the client by sending a Simple Object Access Protocol (SOAP) message to the server (request). For each request, the server replies with a SOAP message containing the result of the requested operation (response) or, in case of error, a fault.

The body of each SOAP message consists of a single part which is named according to the corresponding operation. For requests, the part name is identical to the name of the operation. For responses, the part name is identical to the name of the operation plus the suffix "Response" (see ▶Table 3.2).

Message Type	Part Name
Request	<operation_name>
Response	<operation_name>Response

Table 3.2 Naming Conventions for SOAP Messages

Example: Naming Convention

- Operation: `getAllServices`
- Request: `getAllServices`
- Response: `getAllServicesResponse`

Both request and response elements exclusively contain zero or more child elements according to the detailed description in this guideline. They do not carry any attributes.

3.3. Namespaces

Prefix	Description	URI
hlbs	High Level Biometric Services (HLBS)	http://trbio.bsi.bund.de/hlbs/1
xsd	XML Schema	http://www.w3.org/2001/XMLSchema

Table 3.3 Namespaces

3.4. XML Schema and Web Service Definition

The following XML Schema Definition (.xsd) and Web Service Definition (.wsdl) files are provided with this Technical Guideline in the current version 1v1:

File	Description
HLBS1v1.wsdl	HLBS web service definition (► Chapter 5)
hlbs_servicelv1.xsd	XML Schema Definition for service descriptions (► Section 5.5)

Table 3.4 XML Schema and Web Service Definition

Both files can be found in TR-03121 XML Schema.

3.5. Interoperability

To ensure trouble-free interoperability between different SOAP implementations, both client and server implementations SHOULD fulfil the WS-I Basic Profile 1.1.

4. Interface Overview

4.1. High-Level Biometric Services

4.1.1. Objective

The HLBS interface provides execution and feedback delivery of biometric services.

4.1.2. Service and Device Management

- The function `>getAllServices` provides a list of all biometric services that are available on the server. For each biometric service there is a list of available devices provided.
- The function `>getServiceDescription` provides an XML description of a service-device-combination describing the supported configuration, feedback elements, user commands and results. The XML schema is described in ▶Section 5.5.

4.1.3. Service Execution

- The function `>acquireService` reserves a service-device-combination for use. The function returns a session handle which SHALL be used by the client in subsequent calls. The client MAY provide his own session id to the function.
- The service-device-combination MAY be configured by calling `>configureService`.
- The function `>beginServiceExecution` starts the service execution and returns the initial feedback which SHOULD be used by the client to initialize the GUI.
- The client SHOULD inform the server that client-side processing has finished by calling `>endServiceExecution`.
- The client SHALL release the service-device-combination by calling `>releaseService`.

4.1.4. Service Execution Feedback and Results

- The function `>getServiceFeedback` provides the next available feedback elements
- The client MAY signal user commands by calling the function `>signalUserCommand`.
- The function `>getResults` returns the final results generated by the service execution. It SHALL be called after the service execution has been finished or cancelled.

4.2. Error Handling

If errors occur during processing of a web service request, a SOAP fault is generated according to the SOAP 1.1 specification. SOAP faults are comparable to exceptions in programming languages such as C++, C# or Java insofar as they allow reporting of errors without the need to account for error codes in function signatures.

SOAP faults are returned in place of the SOAP response. Depending on the type of an error, the fault message MAY contain additional information about the error. The faults that are specific to the web services in this document are specified in the respective chapters and listed with every function that MAY generate them. Faults originating from other causes such as network connection problems or validation errors are beyond the scope of this document as they depend on the specific SOAP implementation.

5. High Level Biometric Services API

The HLBS Application Programming Interface (API) contains functions to execute and visualize biometric services. The client defines the User Interface (UI) layout and updates it with the feedback it gets from the server. The server implements the process/workflow and continuously delivers feedback about the process state to the client. User interaction is supported by signalling user commands to the server.

The definitions of the HLBS API are provided in `HLBS1v1.wsdl`. The schema for the service-device description is provided in `hlbs_service1v1.xsd`.

A complete example can be found in ▶Section 6.1.

5.1. Namespaces

The elements of the server- and client-side APIs and the service-device descriptions are members of the namespace <http://trbio.bsi.bund.de/hlbs/1>, which is aliased by `hlbs`.

5.2. Data Types

In addition to simple XSD types, the SOAP interface uses custom data types, which are described in the following.

5.2.1. ServiceType

Represents the type of task a biometric service provides. Each service is bound to exactly one service type. Derived from `xsd:string`.

5.2.1.1. Values

Value	Description
<code>enrolment</code>	The service is used for enrolment.
<code>verification</code>	The service is used for verification.
<code>identification</code>	The service is used for identification.
<code>comparison</code>	The service is used for comparison of two biometric templates.
<code>other</code>	The service is used for another purpose.

Table 5.1 ServiceType Values

5.2.1.2. WSDL Definition

```
<simpleType name="ServiceType">
<restriction base="xsd:string">
  <enumeration value="enrolment"/>
  <enumeration value="verification"/>
  <enumeration value="identification"/>
  <enumeration value="comparison"/>
  <enumeration value="other"/>
</restriction>
</simpleType>
```

5.2.2. BiometricType

Represents the type of a biometric modality. Derived from `xsd:string`.

5.2.2.1. Values

Value	Description
<code>finger</code>	Fingerprint
<code>face</code>	Face
<code>iris</code>	Iris
<code>vein</code>	Vein
<code>signature</code>	Signature
<code>gait</code>	Gait
<code>retina</code>	Retina Scan
<code>hand-geom</code>	Geometry of hand
<code>voice</code>	Voice
<code>palm</code>	Palm
<code>other</code>	Other modality

Table 5.2 BiometricType Values

5.2.2.2. WSDL Definition

```
<simpleType name="BiometricType">
<restriction base="xsd:string">
  <enumeration value="finger"/>
  <enumeration value="face"/>
  <enumeration value="iris"/>
  <enumeration value="vein"/>
  <enumeration value="signature"/>
  <enumeration value="gait"/>
  <enumeration value="retina"/>
  <enumeration value="hand-geom"/>
  <enumeration value="voice"/>
  <enumeration value="palm"/>
  <enumeration value="other"/>
</restriction>
</simpleType>
```

5.2.3. FeedbackStatus

Represents the type of the service execution status. Derived from `xsd:string`.

5.2.3.1. Values

Value	Description
<code>not-started</code>	The service has not been started yet.
<code>running</code>	The service is running.
<code>waiting-for-input</code>	The service is waiting for user input to decide how to continue.
<code>finished</code>	The service has finished.
<code>cancelled</code>	The service was cancelled.

Table 5.3 FeedbackStatus Values

5.2.3.2. WSDL Definition

```
<simpleType name="FeedbackStatus">
<restriction base="xsd:string">
  <enumeration value="not-started"/>
  <enumeration value="running"/>
  <enumeration value="waiting-for-input"/>
  <enumeration value="finished"/>
  <enumeration value="cancelled"/>
</restriction>
</simpleType>
```

5.2.4. UserCommandStatus

Specifies whether a user command is allowed to be signalled at the moment or not. User interfaces SHOULD disable/enable the buttons bound to the corresponding user commands based on this status. Derived from xsd:string.

5.2.4.1. Values

Value	Description
allowed	The user command is allowed to be fired.
not-allowed	The user command is not allowed to be fired.

Table 5.4 UserCommandStatus Values

5.2.4.2. WSDL Definition

```
<simpleType name="UserCommandStatus">
<restriction base="xsd:string">
  <enumeration value="allowed"/>
  <enumeration value="not-allowed"/>
</restriction>
</simpleType>
```

5.2.5. Iso19794FingerImpression

Represents the impression type as specified in [BIB_ISO_FINGER] (e.g. finger or palm). Derived from xsd:unsignedInt.

5.2.5.1. Format Restrictions

The impression type according to [BIB_ISO_FINGER] (e.g. finger or palm) is specified as an unsigned integer where the following values are allowed:

Impression Code	Description
0	Live-scan plain
1	Live-scan rolled
2	Nonlive-scan plain
3	Nonlive-scan rolled
4	Latent impression
5	Latent tracing
6	Latent photo
7	Latent lift

Impression Code	Description
8	Live-scan swipe
9	Live-scan vertical roll
10	Live-scan palm
11	Nonlive-scan palm
12	Latent palm impression
13	Latent palm tracing
14	Latent palm photo
15	Latent palm lift
20	Reserved for future use
21	Reserved for future use
22	Reserved for future use
23	Reserved for future use
24	Live-scan optical contactless plain
25	Reserved for future use
26	Reserved for future use
27	Reserved for future use
28	Other
29	Unknown

Table 5.5 Iso19794FingerImpression Format Restrictions

5.2.5.2. WSDL Definition

```
<simpleType name="Iso19794FingerImpression">
<restriction base="xsd:unsignedInt">
  <pattern value="[0-9]|1[0-5]|2[0-9]"/>
</restriction>
</simpleType>
```

5.2.6. Iso19794FingerCode

A code as defined in [BIB_ISO_FINGER] (e.g. finger or palm). Derived from `xsd:unsignedInt`.

5.2.6.1. Format Restrictions

The code is specified as an unsigned integer where the following values are allowed according to [BIB_ISO_FINGER]:

Finger Code	Finger/Palm Position
0	Unknown
1	Right thumb
2	Right index finger
3	Right middle finger
4	Right ring finger
5	Right little finger

Finger Code	Finger/Palm Position
6	Left thumb
7	Left index finger
8	Left middle finger
9	Left ring finger
10	Left little finger
13	Plain right four fingers
14	Plain left four fingers
15	Plain thumbs (2)
20	Unknown palm
21	Right full palm
22	Right writer's palm
23	Left full palm
24	Left writer's palm
25	Right lower palm
26	Right upper palm
27	Left lower palm
28	Left upper palm
29	Right other
30	Left other
31	Right interdigital
32	Right thenar
33	Right hypothenar
34	Left interdigital
35	Left hemar
36	Left hypothenar
40	Right index and middle
41	Right middle and ring
42	Right ring and little
43	Left index and middle
44	Left middle and ring
45	Left ring and little
46	Right index and left index
47	Right index and middle and ring
48	Right middle and ring and little
49	Left index and middle and ring
50	Left middle and ring and little

Table 5.6 Iso19794FingerCode Format Restrictions

5.2.6.2. WSDL Definition

```
<simpleType name="Iso19794FingerCode">
<restriction base="xsd:unsignedInt">
  <pattern value="[0-9]|10|1[3-5]|2[0-9]|3[0-6]|4[0-9]|50"/>
</restriction>
</simpleType>
```

5.2.7. Iso19794FaceImageCode

Represents a face image code in the format specified in [BIB_ISO_FACE]. Derived from `xsd:unsignedInt`.

5.2.7.1. Format Restrictions

The face code is specified as an unsigned integer between 0 and 255 with the following meanings:

Face Image Code	Description
0	Basic face image
1	Full frontal image
2	Token frontal image
3	Post-processed frontal image
4-127	Reserved by SC 37 for future use
128	Basic 3D face image
129	Full frontal 3D face image
130	Token frontal 3D face image
131-255	Reserved by SC 37 for future use

Table 5.7 Iso19794FaceImageCode Format Restrictions

5.2.7.2. WSDL Definition

```
<simpleType name="Iso19794FaceImageCode">
<restriction base="xsd:unsignedInt">
  <minInclusive value="0"/>
  <maxInclusive value="255"/>
</restriction>
</simpleType>
```

5.2.8. Iso19794IrisImageCode

Represents an iris code in the format specified in [BIB_ISO_IRIS]. Derived from `xsd:unsignedInt`.

5.2.8.1. Format Restrictions

The iris code is specified as an unsigned integer between 0 and 2 with the following meanings:

Iris Image Code	Description
0	Unknown
1	Right iris
2	Left iris

Table 5.8 Iso19794IrisImageCode Format Restrictions

5.2.8.2. WSDL Definition

```
<simpleType name="Iso19794IrisImageCode">
<restriction base="xsd:unsignedInt">
  <minInclusive value="0"/>
  <maxInclusive value="2"/>
</restriction>
</simpleType>
```

5.2.9. DataFormat

Represents an identifier for a data format. Derived from `xsd:string`.

5.2.9.1. Format Restrictions

The data format is represented as a non-empty string. The following values SHOULD be supported by the implementation.

Data Format String	Description
data_format_not_set	Dataformat was not set
opaque	Opaque data format which can be used when the real data format is unknown or unimportant.
iso19794_2	Finger minutiae according to [BIB_ISO_MINUTIAE]
iso19794_4	Finger image according to [BIB_ISO_FINGER]
iso19794_5	Face image according to [BIB_ISO_FACE]
icao_lds_dg1	ICAO LDS datagroup 1
icao_lds_dg2	ICAO LDS datagroup 2 (face image)
icao_lds_dg3	ICAO LDS datagroup 3 (fingerprint images)
icao_lds_dg4	ICAO LDS datagroup 4 (iris images)
icao_lds_dg5	ICAO LDS datagroup 5
icao_lds_dg6	ICAO LDS datagroup 6
icao_lds_dg7	ICAO LDS datagroup 7 (signature)
icao_lds_dg8	ICAO LDS datagroup 8
icao_lds_dg9	ICAO LDS datagroup 9
icao_lds_dg10	ICAO LDS datagroup 10
icao_lds_dg11	ICAO LDS datagroup 11
icao_lds_dg12	ICAO LDS datagroup 12
icao_lds_dg13	ICAO LDS datagroup 13
icao_lds_dg14	ICAO LDS datagroup 14
icao_lds_dg15	ICAO LDS datagroup 15
icao_lds_dg16	ICAO LDS datagroup 16
wsq	Image in WSQ format
bmp	Image in BMP format
jpeg	Image in JPEG format
jpeg2000	Image in JPEG2000 format
png	Image in PNG format

Data Format String	Description
rgb	Image in RGB format
tiff	Image in TIFF format
yuv422	Image in YUV422 format
bioapi_bir	BioAPI 2.0 Biometric Information Record
ansi_nist_itl	ANSI/NIST ITL container
bit	CBEFF Biometric Information Template

Table 5.9 DataFormat Format Restrictions

5.2.9.2. WSDL Definition

```
<simpleType name="DataFormat">
<restriction base="xsd:string">
  <minLength value="1"/>
  <maxLength value="255"/>
</restriction>
</simpleType>
```

5.2.10. ApplicationProfile

Represents an Application Profile of the TR-03121 Part 3. It is hereby defined which requirements (e.g. regarding quality thresholds, data formats, compression or processes) apply to a generalised HLBS service where the Application Profile is configurable. A generalised system using HLBS MAY not support all Application Profiles (e.g. because the system is only used in specific contexts or the system uses a different modality than used within the Application Profile). Derived from `xsd:string`.

5.2.10.1. Format Restrictions

The application profile is represented as a non-empty string. Whether a service definition SHALL support a specific Application Profile, is defined in the respective service definition itself.

Data Format String	Description
BCL_ManualBorderControl	Volume BCL, Application Profile Manual Border Control
BCL_SemiMobileManualBorderControl	Volume BCL, Application Profile Semi-Mobile Manual Border Control
BCL_SelfServiceSystem	Volume BCL, Application Profile Self-Service System
GID_GermanElectronicPassport	Volume GID, Application Profile German Electronic Passport
GID_GermanIdentityCard	Volume GID, Application Profile German Identity Card
GID_GermanElectronicResidencePermit	Volume GID, Application Profile German Electronic Residence Permit
ARE_ArrivalAttestationDocument	Volume ARE, Application Profile Arrival Attestation Document

Data Format String	Description
IMA_MultiModalProcessingImmigrationAuthoritiesEES	Volume IMA, Application Profile Multimodal Processing in Immigration Authorities for EES
IMA_MultiModalProcessingImmigrationAuthoritiesSIS	Volume IMA, Application Profile Multimodal Processing in Immigration Authorities for SIS

Table 5.10 DataFormat Format Restrictions

5.2.10.2. WSDL Definition

```
<simpleType name="DataFormat">
<restriction base="xsd:string">
  <minLength value="1"/>
  <maxLength value="255"/>
</restriction>
</simpleType>
```

5.2.11. DeviceInformation

Contains information about a biometric device.

5.2.11.1. Elements

Element Name	Description
id	xsd:string Unique ID of this device.
vendor	xsd:string The name of the device vendor.
name	xsd:string The name of the device.
version?	xsd:string The version of the device (if available).
firmwareVersion?	xsd:string The firmware version used in the device (if available).
deviceID?	xsd:string The internal id of the device, e.g. the serial number (if available).
biometricType	►hlbs:BiometricType? The biometric modality this device can capture (if available).
properties	►hlbs:KeyValue The specific properties of the device.

Table 5.11 DeviceInformation Elements

5.2.11.2. WSDL Definition

```
<complexType name="DeviceInformation">
<sequence>
  <element name="id" type="xsd:string" minOccurs="1" maxOccurs="1"/>
  <element name="vendor" type="xsd:string" minOccurs="1" maxOccurs="1"/>
  <element name="name" type="xsd:string" minOccurs="1" maxOccurs="1"/>
  <element name="version" type="xsd:string" minOccurs="0" maxOccurs="1" nillable="true"/>
  <element name="firmwareVersion" type="xsd:string" minOccurs="0" maxOccurs="1" nillable="true"/>
```

```

<element name="deviceID" type="xsd:string" minOccurs="0" maxOccurs="1" nillable="true"/>
<element name="biometricType" type="hlbs:BiometricType" minOccurs="0" maxOccurs="1"
nillable="true"/>
<element name="properties" type="hlbs:KeyValue" minOccurs="0" maxOccurs="unbounded"
nillable="true"/>
</sequence>
</complexType>

```

5.2.12. ServiceInformation

Contains information about a biometric service.

5.2.12.1. Elements

Element Name	Description
id	xsd:string Unique ID of this service.
type	►hlbs:ServiceType The type of purpose this service can be used for.
vendor	xsd:string The vendor of the service.
name	xsd:string The name of the service.
version?	xsd:string The version of the service (if available).
devices*	►hlbs:DeviceInformation A list of devices which are connected and can be used in combination with this service. MAY be empty if no devices are connected or when the service doesn't need any devices for its functionality.

Table 5.12 ServiceInformation Elements

5.2.12.2. WSDL Definition

```

<complexType name="ServiceInformation">
<sequence>
<element name="id" type="xsd:string" minOccurs="1" maxOccurs="1"/>
<element name="type" type="hlbs:ServiceType" minOccurs="1" maxOccurs="1"/>
<element name="vendor" type="xsd:string" minOccurs="1" maxOccurs="1"/>
<element name="name" type="xsd:string" minOccurs="1" maxOccurs="1"/>
<element name="version" type="xsd:string" minOccurs="0" maxOccurs="1" nillable="true"/>
<element name="devices" type="hlbs:DeviceInformation" minOccurs="0" maxOccurs="unbounded"/>
</sequence>
</complexType>

```

5.2.13. BiometricImpression

Contains the description of a biometric impression type. It can be used to distinguish between "plain" and "rolled" fingerprint captures for example. At the moment only finger impression types are supported.

5.2.13.1. Elements

Element Name	Description
fingerImpression	►hlbs:Iso19794FingerImpression Represents an impression type according to [BIB_ISO_FINGER]

Table 5.13 BiometricImpression Elements

5.2.13.2. WSDL Definition

```
<complexType name="BiometricImpression">
<choice>
  <element name="fingerImpression" type="hlbs:Iso19794FingerImpression" minOccurs="1" maxOccurs="1"/>
</choice>
</complexType>
```

5.2.14. BiometricCode

Contains the description of a biometric modality. This could be, for example, the specific finger code of a finger which is shown in an image or the description of which kind of facial image should be enrolled.

5.2.14.1. Elements

Element Name	Description
fingerCode	►hlbs:Iso19794FingerCode Represents a finger or palm code according to [BIB_ISO_FINGER]
faceImageCode	►hlbs:Iso19794FaceImageCode Represents a face image code according to [BIB_ISO_FACE]
irisCode	►hlbs:Iso19794IrisImageCode Represents an iris image code according to [BIB_ISO_IRIS]

Table 5.14 BiometricCode Elements

5.2.14.2. WSDL Definition

```
<complexType name="BiometricCode">
<choice>
  <element name="fingerCode" type="hlbs:Iso19794FingerCode" minOccurs="1" maxOccurs="1"/>
  <element name="faceImageCode" type="hlbs:Iso19794FaceImageCode" minOccurs="1" maxOccurs="1"/>
  <element name="irisCode" type="hlbs:Iso19794IrisImageCode" minOccurs="1" maxOccurs="1"/>
</choice>
</complexType>
```

5.2.15. BiometricCodeList

Contains a list of biometric codes. Can be used for example to represent an arbitrary combination of single fingers. Although it is theoretically possible to mix modalities in this list (e.g. finger and iris), this SHOULD be avoided if possible.

5.2.15.1. Elements

Element Name	Description
values*	►hlbs:BiometricCode List of biometric codes.

Table 5.15 BiometricCodeList Elements

5.2.15.2. WSDL Definition

```
<complexType name="BiometricCodeList">
<sequence>
  <element name="values" type="hlbs:BiometricCode" minOccurs="0" maxOccurs="unbounded"/>
</sequence>
</complexType>
```

5.2.16. StringList

Represents a list of strings.

5.2.16.1. Elements

Element Name	Description
items*	xsd:string The items of the string list.

Table 5.16 StringList Elements

5.2.16.2. WSDL Definition

```
<complexType name="StringList">
<sequence>
  <element name="values" type="xsd:string" minOccurs="0" maxOccurs="unbounded"/>
</sequence>
</complexType>
```

5.2.17. UserCommandInfo

Contains information about the current state of a user command. It indicates whether a specific user command can be signalled at the moment (allowed) or not (not-allowed). This information SHOULD be used by the user interface to disable/enable the button/element associated with the command.

5.2.17.1. Elements

Element Name	Description
userCommandId	xsd:string The ID of the user command.
status	►hlbs:UserCommandStatus The current status of the user command.

Table 5.17 UserCommandInfo Elements

5.2.17.2. WSDL Definition

```
<complexType name="UserCommandInfo">
<sequence>
  <element name="userCommandId" type="xsd:string" minOccurs="1" maxOccurs="1"/>
  <element name="status" type="hlbs:UserCommandStatus" minOccurs="1" maxOccurs="1"/>
</sequence>
</complexType>
```

5.2.18. Image

Represents an image.

5.2.18.1. Elements

Element Name	Description
imageData	xsd:base64Binary The image data.
format?	►hlbs:DataFormat The image format (if available).

Element Name	Description
width?	xsd:int The width of the image (if available).
height?	xsd:int The height of the image (if available).
biometricCodeList?	►hlbs:BiometricCodeList A list of biometric codes representing what is shown in the image (if available).
biometricImpression?	►hlbs:BiometricImpression A biometric impression type describing the type of the image (e.g. "plain" or "rolled" - only if available).
imageRegion*	►hlbs:ImageRegion Region(s) within the image.
xmlParameter?	xsd:string Application specific metadata for the given image.

Table 5.18 Image Elements

5.2.18.2. WSDL Definition

```
<complexType name="Image">
<sequence>
  <element name="imageData" type="xsd:base64Binary" minOccurs="1" maxOccurs="1" nillable="true"/>
  <element name="format" type="hlbs:DataFormat" minOccurs="0" maxOccurs="1" nillable="true"/>
  <element name="width" type="xsd:int" minOccurs="0" maxOccurs="1" nillable="true"/>
  <element name="height" type="xsd:int" minOccurs="0" maxOccurs="1" nillable="true"/>
  <element name="biometricCodeList" type="hlbs:BiometricCodeList" minOccurs="0" maxOccurs="1" nillable="true"/>
  <element name="biometricImpression" type="hlbs:BiometricImpression" minOccurs="0" maxOccurs="1" nillable="true"/>
  <element name="imageRegion" type="hlbs:ImageRegion" minOccurs="0" maxOccurs="unbounded" nillable="true"/>
  <element name="xmlParameter" type="xsd:string" minOccurs="0" maxOccurs="1" nillable="true"/>
</sequence>
</complexType>
```

5.2.19. Point

Represents a point.

5.2.19.1. Elements

Element Name	Description
x	xsd:int The x-coordinate of the point.
y	xsd:int The y-coordinate of the point.

Table 5.19 Point Elements

5.2.19.2. WSDL Definition

```
<complexType name="Point">
<sequence>
  <element name="x" type="xsd:int" minOccurs="1" maxOccurs="1"/>
  <element name="y" type="xsd:int" minOccurs="1" maxOccurs="1"/>
</sequence>
</complexType>
```

5.2.20. ImageRegion

Represents a rectangular region within an image.

5.2.20.1. Elements

Element Name	Description
p1	►hlbs:Point The top left point of an rectangular region within an image.
p2	►hlbs:Point The bottom right point of an rectangular region within an image.

Table 5.20 Image Elements

5.2.20.2. WSDL Definition

```
<complexType name="ImageRegion">
<sequence>
  <element name="p1" type="hlbs:Point" minOccurs="1" maxOccurs="1"/>
  <element name="p2" type="hlbs:Point" minOccurs="1" maxOccurs="1"/>
</sequence>
</complexType>
```

5.2.21. ImageList

Represents a list of images.

5.2.21.1. Elements

Element Name	Description
images*	►hlbs:Image The sequence of images.

Table 5.21 ImageList Elements

5.2.21.2. WSDL Definition

```
<complexType name="ImageList">
<sequence>
  <element name="images" type="hlbs:Image" minOccurs="0" maxOccurs="unbounded"/>
</sequence>
</complexType>
```

5.2.22. Binary

Represents binary data.

5.2.22.1. Elements

Element Name	Description
format	►hlbs:DataFormat The dataformat of the binary data.
data	xsd:base64Binary The data.

Table 5.22 Binary Elements

5.2.22.2. WSDL Definition

```
<complexType name="Binary">
<sequence>
  <element name="format" type="hlbs:DataFormat" minOccurs="1" maxOccurs="1"/>
  <element name="data" type="xsd:base64Binary" minOccurs="1" maxOccurs="1" nillable="true"/>
</sequence>
</complexType>
```

5.2.23. KeyValue

Represents a key-value-pair. This element is used to describe and distinguish the different configuration, feed-back and result values.

5.2.23.1. Elements

Element Name	Description
key	xsd:string The unique identifier which specifies the key of the key-value-pair.
boolValue	xsd:boolean A bool value.
intValue	xsd:int An integer value.
floatValue	xsd:float A float value.
stringValue	xsd:string A string value.
biometricImpressionValue	►hlbs:BiometricImpression A biometric impression type value.
biometricCodeValue	►hlbs:BiometricCode A biometric code value.
biometricCodeListValue	►hlbs:BiometricCodeList A biometric code list value.
imageValue	►hlbs:Image An image value.
dataFormatValue	►hlbs:DataFormat A data format value.
binaryValue	►hlbs:Binary A binary value.
stringListValue	►hlbs:StringList A string list value.
imageListValue	►hlbs:ImageList An image list value.

Table 5.23 KeyValue Elements

5.2.23.2. WSDL Definition

```
<complexType name="KeyValue">
<sequence>
  <element name="key" type="xsd:string" minOccurs="1" maxOccurs="1"/>
  <choice>
    <element name="boolValue" type="xsd:boolean" minOccurs="1" maxOccurs="1"/>
    <element name="intValue" type="xsd:int" minOccurs="1" maxOccurs="1"/>
```

```

<element name="floatValue" type="xsd:float" minOccurs="1" maxOccurs="1"/>
<element name="stringValue" type="xsd:string" minOccurs="1" maxOccurs="1" nillable="true"/>
<element name="biometricImpressionValue" type="hlbs:BiometricImpression" minOccurs="1"
maxOccurs="1" nillable="true"/>
<element name="biometricCodeValue" type="hlbs:BiometricCode" minOccurs="1" maxOccurs="1"
nillable="true"/>

<element name="biometricCodeListValue" type="hlbs:BiometricCodeList" minOccurs="1" maxOccurs="1"
nillable="true"/>
<element name="imageValue" type="hlbs:Image" minOccurs="1" maxOccurs="1" nillable="true"/>
<element name="dataFormatValue" type="hlbs:DataFormat" minOccurs="1" maxOccurs="1"
nillable="true"/>
<element name="binaryValue" type="hlbs:Binary" minOccurs="1" maxOccurs="1" nillable="true"/>
<element name="stringListValue" type="hlbs:StringList" minOccurs="1" maxOccurs="1"
nillable="true"/>

<element name="imageListValue" type="hlbs:ImageList" minOccurs="1" maxOccurs="1" nillable="true"/>
>
</choice>
</sequence>
</complexType>

```

5.2.24. UserCommand

Represents a user command, which can be signaled by the application. A user command MAY contain parameters which reveal further details about the command. It depends on the concrete service whether parameters for certain commands are supported or not.

5.2.24.1. Elements

Element Name	Description
userCommandId	xsd:string The ID if the user command which is signalled.
parameters*	►hlbs:KeyValue A list of key-value-pairs describing further details about the command (OPTIONAL).

Table 5.24 UserCommand Elements

5.2.24.2. WSDL Definition

```

<complexType name="UserCommand">
<sequence>
<element name="userCommandId" type="xsd:string" minOccurs="1" maxOccurs="1"/>
<element name="parameters" type="hlbs:KeyValue" minOccurs="0" maxOccurs="unbounded"/>
</sequence>
</complexType>

```

5.2.25. Feedback

Represents the current state of the service execution including information about the user command states, live feedback and the general execution state. An implementation SHOULD only transfer feedback to the user that has changed since the last feedback delivery for performance reasons. However, it SHALL NOT lead to an error in the client if the server sends equal feedback elements in successive calls.

5.2.25.1. Elements

Element Name	Description
status	►hlbs:FeedbackStatus The current state of the service execution (running, finished, cancelled, ...).

Element Name	Description
userCommands*	►hlbs:UserCommandInfo A list of user command info which represent the current state of the user commands.
feedbackElements*	►hlbs:KeyValue A list of feedback elements with live information about the service execution.

Table 5.25 Feedback Elements

5.2.25.2. WSDL Definition

```
<complexType name="Feedback">
<sequence>
  <element name="status" type="hlbs:FeedbackStatus" minOccurs="1" maxOccurs="1"/>
  <element name="userCommands" type="hlbs:UserCommandInfo" minOccurs="0" maxOccurs="unbounded"/>
  <element name="feedbackElements" type="hlbs:KeyValue" minOccurs="0" maxOccurs="unbounded"/>
</sequence>
</complexType>
```

5.2.26. Results

Represents the results of a service execution. Results can be retrieved as soon as the service execution has finished or was cancelled.

5.2.26.1. Elements

Element Name	Description
resultElements*	►hlbs:KeyValue A list of key-value-pairs representing the results of the service execution.

Table 5.26 Results Elements

5.2.26.2. WSDL Definition

```
<complexType name="Results">
<sequence>
  <element name="resultElements" type="hlbs:KeyValue" minOccurs="0" maxOccurs="unbounded"/>
</sequence>
</complexType>
```

5.3. Fault Types

This section specifies the SOAP faults that are specific to this SOAP API. No fault has any attributes.

5.3.1. InvalidId

Base type of other faults which are returned when an invalid id is specified in a call.

5.3.1.1. Elements

Element Name	Description
id	xsd:string The value of the invalid id.

Table 5.27 InvalidId Elements

5.3.1.2. WSDL Definition

```
<complexType name="InvalidId">
  <sequence>
    <element name="id" type="xsd:string" minOccurs="1" maxOccurs="1"/>
  </sequence>
</complexType>
```

5.3.2. InvalidServiceId

Returned when no service with the given ID is found. Derived from `hlbs:InvalidId`.

5.3.2.1. Elements

None.

5.3.2.2. WSDL Definition

```
<complexType name="InvalidServiceId">
  <complexContent>
    <extension base="hlbs:InvalidId">
      <sequence>
      </sequence>
    </extension>
  </complexContent>
</complexType>
```

5.3.3. InvalidDeviceId

Returned when no device with the given ID is supported by the respective service. Derived from `hlbs:InvalidId`.

5.3.3.1. Elements

None.

5.3.3.2. WSDL Definition

```
<complexType name="InvalidDeviceId">
  <complexContent>
    <extension base="hlbs:InvalidId">
      <sequence>
      </sequence>
    </extension>
  </complexContent>
</complexType>
```

5.3.4. InvalidSessionHandle

Returned when an unknown session handle is specified.

5.3.4.1. Elements

None.

5.3.4.2. WSDL Definition

```
<complexType name="InvalidSessionHandle">
  <complexContent>
    <extension base="hlbs:InvalidId">
      <sequence>
      </sequence>
    </extension>
  </complexContent>
</complexType>
```

```

</extension>
</complexContent>
</complexType>

```

5.3.5. InvalidParameterKey

Returned when an unknown parameter key is specified in a key-value-pair.

5.3.5.1. Elements

None.

5.3.5.2. WSDL Definition

```

<complexType name="InvalidParameterKey">
  <complexContent>
    <extension base="hlbs:InvalidId">
      <sequence>
        </sequence>
    </extension>
  </complexContent>
</complexType>

```

5.3.6. InvalidParameterValue

Returned when the value associated with a parameter key is not valid. This could happen for example if the specified value is out of the valid range or of an invalid type.

5.3.6.1. Elements

Element Name	Description
parameterKey	xsd:string The name of the parameter key whose value is considered invalid.

Table 5.28 InvalidParameterValue Elements

5.3.6.2. WSDL Definition

```

<complexType name="InvalidParameterValue">
  <sequence>
    <element name="parameterKey" type="xsd:string" minOccurs="1" maxOccurs="1"/>
  </sequence>
</complexType>

```

5.3.7. AlreadyInUse

Returned when a service-device-combination is acquired when it is currently already acquired by someone else.

5.3.7.1. Elements

Element Name	Description
serviceId	xsd:string The ID of the service whose acquirement failed.
deviceId	xsd:string The ID of the device whose acquirement failed.

Table 5.29 AlreadyInUse Elements

5.3.7.2. WSDL Definition

```
<complexType name="AlreadyInUse">
  <sequence>
    <element name="serviceId" type="xsd:string" minOccurs="1" maxOccurs="1"/>
    <element name="deviceId" type="xsd:string" minOccurs="1" maxOccurs="1"/>
  </sequence>
</complexType>
```

5.3.8. TimeoutOccured

Returned when a function timed out.

5.3.8.1. Elements

None.

5.3.8.2. WSDL Definition

```
<complexType name="TimeoutOccured">
  <sequence>
  </sequence>
</complexType>
```

5.3.9. InvalidUserCommandId

Returned when an unknown user command is signalled.

5.3.9.1. Elements

None.

5.3.9.2. WSDL Definition

```
<complexType name="InvalidUserCommandId">
  <complexContent>
    <extension base="hlbs:InvalidId">
      <sequence>
      </sequence>
    </extension>
  </complexContent>
</complexType>
```

5.3.10. NotFinishedYet

Returned when results should be retrieved, but the service execution has not finished yet.

5.3.10.1. Elements

None.

5.3.10.2. WSDL Definition

```
<complexType name="NotFinishedYet">
  <sequence>
  </sequence>
</complexType>
```

5.3.11. MTOMNotSupported

Return when MTOM attachments are requested for feedback delivery but are not supported by the server.

5.3.11.1. Elements

None.

5.3.11.2. WSDL Definition

```
<complexType name="MTOMNotSupported">
<sequence>
</sequence>
</complexType>
```

5.3.12. AlreadyRunning

Returned when a service-device-combination should be executed but has already been started before.

5.3.12.1. Elements

None.

5.3.12.2. WSDL Definition

```
<complexType name="AlreadyRunning">
<sequence>
</sequence>
</complexType>
```

5.4. Operations

5.4.1. getAllServices

Returns a list of all available services. Each service description contains a list devices which can be selected for the service execution.

5.4.1.1. Request Elements

None.

5.4.1.2. Response Elements

Element Name	Description
service*	►hlbs:ServiceInformation List of service information.

Table 5.30 getAllServices Response Elements

5.4.1.3. Faults

None.

5.4.1.4. WSDL Definition

```
<element name="getAllServices">
<complexType>
<sequence>
</sequence>
</complexType>
</element>
<element name="getAllServicesResponse">
<complexType>
<sequence>
<element name="service" type="hlbs:ServiceInformation" minOccurs="0" maxOccurs="unbounded"/>
```

```

</sequence>
</complexType>
</element>

```

5.4.2. getServiceDescription

Returns an XML description of a service-device-combination. The XML schema is defined in ▶Section 5.5 and contains a description of the possible configuration values, feedback values, user commands and results. The primary purpose of the description is to give the application programmer an overview of the service and help him to implement the application. But of course it is also possible to parse the description in the application and, for example, dynamically generate or adjust the user interface for the specific service-device-combination.

5.4.2.1. Request Elements

Element Name	Description
serviceID	xsd:string The ID of the service.
deviceID?	xsd:string The ID of the device (OPTIONAL).

Table 5.31 getAllServices Request Elements

5.4.2.2. Response Elements

Element Name	Description
serviceDescriptionXML	xsd:string The description of the service-device-combination as XML. The XML schema is defined in ▶Section 5.5.

Table 5.32 getServiceDescription Response Elements

5.4.2.3. Faults

Fault	Cause
InvalidServiceId	The specified service id is unknown.
InvalidDeviceId	The specified device id is unknown or is not supported by the selected service.

Table 5.33 getServiceDescription Faults

5.4.2.4. WSDL Definition

```

<element name="getServiceDescription">
<complexType>
  <sequence>
    <element name="serviceID" type="xsd:string" minOccurs="1" maxOccurs="1"/>
    <element name="deviceID" type="xsd:string" minOccurs="0" maxOccurs="1"/>
  </sequence>
</complexType>
</element>
<element name="getServiceDescriptionResponse">
<complexType>
  <sequence>
    <element name="serviceDescriptionXML" type="xsd:string" minOccurs="1" maxOccurs="1"/>
  </sequence>
</complexType>
</element>

```

5.4.3. acquireService

Exclusively reserves a service-device-combination for use. Each service-device-combination can only be acquired once at the same time. To release the lock, the function releaseService SHALL be called.

5.4.3.1. Request Elements

Element Name	Description
serviceID	xsd:string The ID of the service to acquire.
deviceID?	xsd:string The ID of the device to acquire (OPTIONAL). If no device ID is specified, the function only succeeds if the service can be executed without a device.
sessionHandle?	xsd:string If specified, this sessionHandle is used instead of an automatically generated one.

Table 5.34 acquireService Request Elements

5.4.3.2. Response Elements

Element Name	Description
sessionHandle	xsd:string The session handle which SHALL be used in consecutive calls. If a session handle was specified in the request, the returned handle equals the one from the request.

Table 5.35 acquireService Response Elements

5.4.3.3. Faults

Fault	Cause
AlreadyInUse	The service-device-combination is already acquired. It can only be REQUIRED if it is released before.
InvalidServiceId	The specified service ID is unknown.
InvalidDeviceId	The specified device ID is unknown or is not supported by this service.

Table 5.36 acquireService Faults

5.4.3.4. WSDL Definition

```

<element name="acquireService">
<complexType>
<sequence>
    <element name="serviceID" type="xsd:string" minOccurs="1" maxOccurs="1"/>
    <element name="deviceID" type="xsd:string" minOccurs="0" maxOccurs="1"/>
    <element name="sessionHandle" type="xsd:string" minOccurs="0" maxOccurs="1"/>
</sequence>
</complexType>
</element>
<element name="acquireServiceResponse">
<complexType>
<sequence>
    <element name="sessionHandle" type="xsd:string" minOccurs="1" maxOccurs="1"/>
</sequence>
</complexType>
</element>

```

5.4.4. configureService

Sets configuration values for a service-device-combination which can influence the service behaviour or feedback delivery. It SHALL be possible to call this function multiple times for the same session handle. Newer configuration values SHALL overwrite values which were set in previous calls. It SHALL be possible to call this method before `beginServiceExecution` is called. It SHOULD be possible to call this method even after `beginServiceExecution` was called.

5.4.4.1. Request Elements

Element Name	Description
sessionHandle	<code>xsd:string</code> The session handle belonging to the service-device-combination which should be configured.
Parameters+	<code>hlbs:KeyValue</code> List of key-value-pairs containing the configuration values to be set.

Table 5.37 configureService Request Elements

5.4.4.2. Response Elements

None.

5.4.4.3. Faults

Fault	Cause
InvalidSessionHandle	The specified session handle is not valid.
InvalidParameterKey	One of the specified parameter keys is not supported by the service.
InvalidParameterValue	One of the specified parameter values is not valid (e.g. because it is out of range or of invalid type).

Table 5.38 configureService Faults

5.4.4.4. WSDL Definition

```

<element name="configureService">
<complexType>
  <sequence>
    <element name="sessionHandle" type="xsd:string" minOccurs="1" maxOccurs="1"/>
    <element name="parameters" type="hlbs:KeyValue" minOccurs="1" maxOccurs="unbounded"/>
  </sequence>
</complexType>
</element>
<element name="configureServiceResponse">
<complexType>
  <sequence>
  </sequence>
</complexType>
</element>

```

5.4.5. beginServiceExecution

Starts the execution of an acquired service-device-combination. The response of this method contains the initial state of the service execution which SHOULD be used to initialize the user interface. After this call the service process starts and the application SHOULD update the user interface by calling the function `getServiceFeedback` in a loop until the service execution finished.

5.4.5.1. Request Elements

Element Name	Description
sessionHandle	xsd:string The session handle belonging to the acquired service-device-combination which should be started.
useMTOM?	xsd:boolean If true and supported by the server, all binary data in the feedback and result queries are returned as MTOM attachments. Otherwise, all binary data is returned as normal base64 encoded strings. It is recommended to use MTOM attachments because of improved performance.

Table 5.39 beginServiceExecution Request Elements

5.4.5.2. Response Elements

Element Name	Description
feedback	►hlbs:Feedback Feedback which describes the initial state of the service execution.

Table 5.40 beginServiceExecution Response Elements

5.4.5.3. Faults

Fault	Cause
InvalidSessionHandle	The specified session handle is unknown.
AlreadyRunning	The service execution has already been started.
MTOMNotSupported	The server doesn't support MTOM attachments.

Table 5.41 beginServiceExecution Faults

5.4.5.4. WSDL Definition

```

<element name="beginServiceExecution">
<complexType>
  <sequence>
    <element name="sessionHandle" type="xsd:string" minOccurs="1" maxOccurs="1"/>
    <element name="useMTOM" type="xsd:boolean" minOccurs="0" maxOccurs="1" nillable="true"/>
  </sequence>
</complexType>
</element>
<element name="beginServiceExecutionResponse">
<complexType>
  <sequence>
    <element name="feedback" type="hlbs:Feedback" minOccurs="1" maxOccurs="1"/>
  </sequence>
</complexType>
</element>

```

5.4.6. getServiceFeedback

Returns the current state of the service execution. The server SHOULD only return feedback elements which have changed since the last call of this function. It is assumed that feedback elements which are not present in the response haven't changed. If the function runs into a timeout the application SHOULD still continue the feedback loop.

5.4.6.1. Request Elements

Element Name	Description
sessionHandle	xsd:string The session handle of the service execution for which the next feedback should be retrieved.
timeout-ms	xsd:int Timeout in ms after which the function returns if no new feedback is available. If the value is smaller than 0, no timeout will be set.

Table 5.42 getServiceFeedback Request Elements

5.4.6.2. Response Elements

Element Name	Description
feedback	►hlbs:Feedback The feedback elements.

Table 5.43 getServiceFeedback Response Elements

5.4.6.3. Faults

Fault	Cause
InvalidSessionHandle	The specified session handle is unknown.
TimeoutOccured	The timeout has expired and no changed feedback elements were found.

Table 5.44 getServiceFeedback Faults

5.4.6.4. WSDL Definition

```

<element name="getServiceFeedback">
<complexType>
  <sequence>
    <element name="sessionHandle" type="xsd:string" minOccurs="1" maxOccurs="1"/>
    <element name="timeout-ms" type="xsd:int" minOccurs="1" maxOccurs="1"/>
  </sequence>
</complexType>
</element>
<element name="getServiceFeedbackResponse">
<complexType>
  <sequence>
    <element name="feedback" type="hlbs:Feedback" minOccurs="1" maxOccurs="1"/>
  </sequence>
</complexType>
</element>

```

5.4.7. signalUserCommand

Signals a user command with OPTIONAL additional parameters. This function is typically called when a user executes a command in the user interface, like clicking a button for example. The function will return an error when the signalled user command is not allowed by the service at the moment.

5.4.7.1. Request Elements

Element Name	Description
sessionHandle	xsd:string The session handle for which this user command is signalled.
userCommand	►hlbs:UserCommand The user command to be signalled.

Table 5.45 signalUserCommand Request Elements

5.4.7.2. Response Elements

None.

5.4.7.3. Faults

Fault	Cause
InvalidSessionHandle	The specified session handle is unknown.
InvalidUserCommandId	The specified user command id is unknown or not allowed at the moment.
InvalidParameterKey	One of the command parameters has an unknown key.
InvalidParameterValue	One of the command parameters has an invalid value (e.g. out of range or of invalid type).

Table 5.46 signalUserCommand Faults

5.4.7.4. WSDL Definition

```

<element name="signalUserCommand">
  <complexType>
    <sequence>
      <element name="sessionHandle" type="xsd:string" minOccurs="1" maxOccurs="1"/>
      <element name="userCommand" type="hlbs:UserCommand" minOccurs="1" maxOccurs="1"/>
    </sequence>
  </complexType>
</element>
<element name="signalUserCommandResponse">
  <complexType>
    <sequence>
    </sequence>
  </complexType>
</element>

```

5.4.8. endServiceExecution

Stops the service execution. This call is OPTIONAL because it is also implicitly called when `releaseService` is called. However, it is recommended to call this function before the function `getResults` is called to ensure that service execution has finished.

5.4.8.1. Request Elements

Element Name	Description
sessionHandle	xsd:string The session handle whose execution should be stopped.

Table 5.47 endServiceExecution Request Elements

5.4.8.2. Response Elements

None.

5.4.8.3. Faults

Fault	Cause
InvalidSessionHandle	The specified session handle is unknown.

Table 5.48 endServiceExecution Faults

5.4.8.4. WSDL Definition

```

<element name="endServiceExecution">
<complexType>
<sequence>
<element name="sessionHandle" type="xsd:string" minOccurs="1" maxOccurs="1"/>
</sequence>
</complexType>
</element>
<element name="endServiceExecutionResponse">
<complexType>
<sequence>
</sequence>
</complexType>
</element>

```

5.4.9. getResults

Returns the results generated by the service execution. The service execution SHALL have finished before this function can be called. Even if the execution was cancelled or ran into an error the function `getResults` SHOULD still be called to get intermediate results or log data describing the errors.

5.4.9.1. Request Elements

Element Name	Description
sessionHandle	xsd:string The session handle for which the results are requested.

Table 5.49 getResults Request Elements

5.4.9.2. Response Elements

Element Name	Description
results	►hlbs:Results The results generated by the service execution

Table 5.50 getResults Response Elements

5.4.9.3. Faults

Fault	Cause
InvalidSessionHandle	The specified session handle is unknown.
NotFinishedYet	The service execution has not been finished yet.

Table 5.51 getResults Faults

5.4.9.4. WSDL Definition

```

<element name="getResults">
<complexType>
<sequence>
<element name="sessionHandle" type="xsd:string" minOccurs="1" maxOccurs="1"/>
</sequence>
</complexType>
</element>
<element name="getResultsResponse">
<complexType>
<sequence>
<element name="results" type="hlbs:Results" minOccurs="1" maxOccurs="1"/>
</sequence>
</complexType>
</element>

```

5.4.10. releaseService

Releases an acquired service-device-combination and makes this combination available for new acquisitions. Implicitly calls `endServiceExecution` to make sure that the service execution has finished before the lock is released. After the call the session handle is invalid.

5.4.10.1. Request Elements

Element Name	Description
sessionHandle	xsd:string The session handle to be released.

Table 5.52 releaseService Request Elements

5.4.10.2. Response Elements

None.

5.4.10.3. Faults

Fault	Cause
InvalidSessionHandle	The specified session handle is unknown.

Table 5.53 releaseService Faults

5.4.10.4. WSDL Definition

```

<element name="releaseService">
<complexType>
<sequence>
<element name="sessionHandle" type="xsd:string" minOccurs="1" maxOccurs="1"/>
</sequence>
</complexType>
</element>
<element name="releaseServiceResponse">
<complexType>
<sequence>
</sequence>
</complexType>
</element>

```

5.5. Service-Device Description Schema

The XML schema for the HLBS service-device description can be found in the file `hlbs_service_v1.xsd`. The namespace of the definition is ↗<http://trbio.bsi.bund.de/hlbs/1>.

An example can be found in ▶Section 6.1.

5.5.1. Self-Device Description Document

XML document that provides the following information about a service-device-combination:

- General information about the service
- General information about the device
- Information about possible configuration values
- Information about available user commands
- Information about provided feedback
- Information about provided results

5.5.1.1. Root Element

Element Name	Description
Service	► <code>hlbs:type.service</code> Root element of the service-device description.

Table 5.54 Root Element

5.5.1.2. XSD Definition

```
<xss:element name="Service" type="hlbs:type.service"/>
```

5.5.2. type.service

Root element of a HLBS service-device description.

5.5.2.1. Attributes

Attribute Name	Description
schemaVersion	<code>xsd:integer</code> The <code>schemaVersion</code> currently has the value 1.

Table 5.55 type.service Attributes

5.5.2.2. Elements

Element Name	Description
Information	► <code>hlbs:type.information</code> General information about the service and device.
Configuration?	► <code>hlbs:type.configuration</code> Information about possible configuration values (if available).
UserCommands?	► <code>hlbs:type.user.commands</code> Information about possible user commands (if available).
FeedbackElements?	► <code>hlbs:type.feedback</code> Information about possible feedback elements (if available).

Element Name	Description
Results	►hlbs:type.feedback Information about possible results.

Table 5.56 type.service Elements

```

<xs:complexType name="type.service">
<xs:sequence>
  <xs:element name="Information" type="hlbs:type.information" minOccurs="1" maxOccurs="1" />
  <xs:element name="Configuration" type="hlbs:type.configuration" minOccurs="0" maxOccurs="1" />
  <xs:element name="UserCommands" type="hlbs:type.user.commands" minOccurs="0" maxOccurs="1" />
  <xs:element name="FeedbackElements" type="hlbs:type.feedback" minOccurs="0" maxOccurs="1" />
  <xs:element name="Results" type="hlbs:type.feedback" minOccurs="1" maxOccurs="1" />
</xs:sequence>
<xs:attribute name="schemaVersion" type="xs:integer" use="required" />
</xs:complexType>

```

5.5.3. type.information

Provides general information about the service and the corresponding device.

5.5.3.1. Attributes

None.

5.5.3.2. Elements

Element Name	Description
Id	xs:string Unique ID of this service.
Vendor?	xs:string Name of the vendor of the service (if available).
Name	xs:string Name of the service.
Version?	xs:string Version of the service (if available).
Description?	xs:string Textual description of the service (if available).
Type	►hlbs:type.information.service.type Purpose/Type of this service.
Device?	►hlbs:type.information.devices.device Information about the device (if available).

Table 5.57 type.information Elements

```

<xs:complexType name="type.information">
<xs:sequence>
  <xs:element name="Id" minOccurs="1" maxOccurs="1" type="xs:string" />
  <xs:element name="Vendor" minOccurs="0" maxOccurs="1" type="xs:string" />
  <xs:element name="Name" minOccurs="1" maxOccurs="1" type="xs:string"/>
  <xs:element name="Version" minOccurs="0" maxOccurs="1" type="xs:string"/>
  <xs:element name="Description" minOccurs="0" maxOccurs="1" type="xs:string"/>
</xs:sequence>

```

```

<xs:element name="Type" minOccurs="1" maxOccurs="1" type="hlbs:type.information.service.type" />
<xs:element name="Device" minOccurs="0" maxOccurs="1" type="hlbs:type.information.devices.device" />
</xs:sequence>
</xs:complexType>

```

5.5.4. type.information.service.type

Represents the purpose of the service. Derived from `xs:string`.

5.5.4.1. Values

Value	Description
Enrolment	The service is used for enrolment.
Verification	The service is used for verification.
Comparison	The service is used for comparison of two biometric templates.
Other	The service is used for another purpose.

Table 5.58 type.information.service.type Values

5.5.4.2. XSD Definition

```

<xs:simpleType name="type.information.service.type">
<xs:restriction base="xs:string">
  <xs:enumeration value="Enrolment" />
  <xs:enumeration value="Verification" />
  <xs:enumeration value="Comparison" />
  <xs:enumeration value="Other" />
</xs:restriction>
</xs:simpleType>

```

5.5.5. type.information.devices.device

Provides general information about the selected device.

5.5.5.1. Attributes

None.

5.5.5.2. Elements

Element Name	Description
Id	<code>xs:string</code> Unique ID of this service.
Vendor?	<code>xs:string</code> Name of the vendor of the device (if available).
Name	<code>xs:string</code> Name of the device.
Version?	<code>xs:string</code> Version of the device (if available).
FirmwareVersion?	<code>xs:string</code> Firmware version of the device (if available).
DeviceId?	<code>xs:string</code> The device id (if available, e.g. the serial number).

Element Name	Description
BiometricType?	►hlbs:type.device.biometric.type The biometric modality this device can capture (if available).
Properties?	►hlbs:type.device.properties Specific properties of the device (if available).

Table 5.59 type.information.devices.device Elements

```
<xs:complexType name="type.information.devices.device">
<xs:sequence>
    <xs:element name="Id" minOccurs="1" maxOccurs="1" type="xs:string" />
    <xs:element name="Vendor" minOccurs="0" maxOccurs="1" type="xs:string" />
    <xs:element name="Name" minOccurs="1" maxOccurs="1" type="xs:string" />
    <xs:element name="Version" minOccurs="0" maxOccurs="1" type="xs:string" />
    <xs:element name="FirmwareVersion" minOccurs="0" maxOccurs="1" type="xs:string" />
    <xs:element name="DeviceID" minOccurs="0" maxOccurs="1" type="xs:string" />
    <xs:element name="BiometricType" minOccurs="0" maxOccurs="1"
type="hlbs:type.device.biometric.type" />
    <xs:element name="Properties" minOccurs="0" maxOccurs="1" type="hlbs:type.device.properties" />
</xs:sequence>
</xs:complexType>
```

5.5.6. type.device.biometric.type

Represents the biometric modality a device can capture. Derived from `xs:string`.

5.5.6.1. Values

Value	Description
Finger	Fingerprints
Face	Face
Iris	Iris
Vein	Vein
Signature	Signature
Gait	Gait
Retina	Retina
HandGeometry	HandGeometry
Voice	Voice
Palm	Palm
Other	Other

Table 5.60 type.device.biometric.type Values

5.5.6.2. XSD Definition

```
<xs:simpleType name="type.device.biometric.type">
<xs:restriction base="xs:string">
    <xs:enumeration value="Finger" />
    <xs:enumeration value="Face" />
    <xs:enumeration value="Iris" />
    <xs:enumeration value="Vein" />
    <xs:enumeration value="Signature" />
```

```

<xs:enumeration value="Gait" />
<xs:enumeration value="Retina" />
<xs:enumeration value="HandGeometry" />
<xs:enumeration value="Voice" />
<xs:enumeration value="Palm" />
<xs:enumeration value="Other" />
</xs:restriction>
</xs:simpleType>

```

5.5.7. type.device.properties

5.5.7.1. Attributes

None.

5.5.7.2. Elements

A list of one or more of the following elements:

Element Name	Description
Boolean	►hlbs:type.device.properties.boolean A boolean device property value.
Integer	►hlbs:type.device.properties.integer An integer device property value.
String	►hlbs:type.device.properties.string A string device property value.
Float	►hlbs:type.device.properties.float A float device property value.

Table 5.61 type.device.properties Elements

5.5.7.3. XSD Definition

```

<xs:complexType name="type.device.properties">
<xs:choice minOccurs="1" maxOccurs="unbounded">
    <xs:element name="Boolean" type="hlbs:type.device.properties.boolean" />
    <xs:element name="Integer" type="hlbs:type.device.properties.integer" />
    <xs:element name="String" type="hlbs:type.device.properties.string" />
    <xs:element name="Float" type="hlbs:type.device.properties.float" />
</xs:choice>
</xs:complexType>

```

5.5.8. type.device.properties.base

Base type that contains data which is shared among all device property values.

5.5.8.1. Attributes

Attribute Name	Description
id	xs:string The id of the device property value.

Table 5.62 type.configuration.base Attributes

5.5.8.2. Elements

None.

5.5.8.3. XSD Definition

```
<xs:complexType name="type.device.properties.base">
  <xs:attribute name="id" type="xs:string" use="required"/>
</xs:complexType>
```

5.5.9. type.device.properties.boolean

A boolean device property value. Derived from `hlbs:type.device.properties.base`.

5.5.9.1. Attributes

Attribute Name	Description
value	<code>xs:boolean</code> Value of this device property.

Table 5.63 type.device.properties.boolean Attributes

5.5.9.2. Elements

None.

5.5.9.3. XSD Definition

```
<xs:complexType name="type.device.properties.boolean">
  <xs:complexContent>
    <xs:extension base="hlbs:type.device.properties.base">
      <xs:attribute name="value" type="xs:boolean" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

5.5.10. type.device.properties.integer

An integer device property value. Derived from `hlbs:type.device.properties.base`.

5.5.10.1. Attributes

Attribute Name	Description
value	<code>xs:integer</code> Value of this device property.

Table 5.64 type.device.properties.integer Attributes

5.5.10.2. Elements

None.

5.5.10.3. XSD Definition

```
<xs:complexType name="type.device.properties.integer">
  <xs:complexContent>
    <xs:extension base="hlbs:type.device.properties.base">
      <xs:attribute name="value" type="xs:integer" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

5.5.11. type.device.properties.string

A string device property value. Derived from `&hlbs:type.device.properties.base`.

5.5.11.1. Attributes

Attribute Name	Description
value	<code>xs:string</code> Value of this device property.

Table 5.65 type.device.properties.string Attributes

5.5.11.2. Elements

None.

5.5.11.3. XSD Definition

```
<xs:complexType name="type.device.properties.string">
  <xs:complexContent>
    <xs:extension base="hlbs:type.device.properties.base">
      <xs:attribute name="value" type="xs:string" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

5.5.12. type.device.properties.float

A float device property value. Derived from `&hlbs:type.device.properties.base`.

5.5.12.1. Attributes

Attribute Name	Description
value	<code>xs:float</code> Value of this device property.

Table 5.66 type.device.properties.float Attributes

5.5.12.2. Elements

None.

5.5.12.3. XSD Definition

```
<xs:complexType name="type.device.properties.float">
  <xs:complexContent>
    <xs:extension base="hlbs:type.device.properties.base">
      <xs:attribute name="value" type="xs:float" use="required"/>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

5.5.13. type.configuration

Provides information about all possible configuration values.

5.5.13.1. Attributes

None.

5.5.13.2. Elements

A list of one or more of the following elements:

Element Name	Description
Boolean	►hlbs:type.configuration.boolean A boolean configuration value.
Integer	►hlbs:type.configuration.integer An integer configuration value.
String	►hlbs:type.configuration.string A string configuration value.
Float	►hlbs:type.configuration.float A float configuration value.
BiometricCode	►hlbs:type.configuration.biometricCode A biometric code configuration value.
BiometricCodeList	►hlbs:type.configuration.biometricCodeList A list of biometric codes configuration value.
BiometricImpression	►hlbs:type.configuration.biometricImpression A biometric impression type configuration value.
Image	►hlbs:type.configuration.image An image configuration value.
ImageList	►hlbs:type.configuration.imageList An image list configuration value.
DataFormat	►hlbs:type.configuration.dataformat A data format value configuration value.
Binary	►hlbs:type.configuration.binary A binary data value configuration value.

Table 5.67 type.configuration Elements

5.5.13.3. XSD Definition

```

<xs:complexType name="type.configuration">
<xs:choice minOccurs="1" maxOccurs="unbounded">
  <xs:element name="Boolean" type="hlbs:type.configuration.boolean" />
  <xs:element name="Integer" type="hlbs:type.configuration.integer" />
  <xs:element name="String" type="hlbs:type.configuration.string" />
  <xs:element name="Float" type="hlbs:type.configuration.float" />
  <xs:element name="BiometricCode" type="hlbs:type.configuration.biometricCode" />
  <xs:element name="BiometricCodeList" type="hlbs:type.configuration.biometricCodeList" />
  <xs:element name="BiometricImpression" type="hlbs:type.configuration.biometricImpression" />
  <xs:element name="Image" type="hlbs:type.configuration.image" />
  <xs:element name="ImageList" type="hlbs:type.configuration.imageList" />
  <xs:element name="DataFormat" type="hlbs:type.configuration.dataformat" />
  <xs:element name="Binary" type="hlbs:type.configuration.binary" />
</xs:choice>
</xs:complexType>

```

5.5.14. type.configuration.base

Base type that contains data which is shared among all configuration values.

5.5.14.1. Attributes

Attribute Name	Description
id	xs:string The id of the configuration value.
mandatory?	xs:boolean If true, this configuration value SHALL be provided before the service execution starts. Default: false
modifiable?	xs:string Name of the service.
Version?	xs:boolean If true, this configuration value can be changed by the application. Otherwise the value is only listed for information. Default: true

Table 5.68 type.configuration.base Attributes

5.5.14.2. Elements

None.

5.5.14.3. XSD Definition

```
<xs:complexType name="type.configuration.base">
  <xs:attribute name="id" type="xs:string" use="required"/>
  <xs:attribute name="mandatory" type="xs:boolean" default="false" />
  <xs:attribute name="modifiable" type="xs:boolean" default="true" />
</xs:complexType>
```

5.5.15. type.configuration.boolean

A boolean configuration value. Derived from `hlbs:type.configuration.base`.

5.5.15.1. Attributes

Attribute Name	Description
default	xs:boolean Default value of this configuration entry which is used if the value is not overridden by the application.

Table 5.69 type.configuration.boolean Attributes

5.5.15.2. Elements

None.

5.5.15.3. XSD Definition

```
<xs:complexType name="type.configuration.boolean">
<xs:complexContent>
  <xs:extension base="hlbs:type.configuration.base">
    <xs:attribute name="default" type="xs:boolean" use="required"/>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

5.5.16. type.configuration.integer

An integer configuration value. Derived from `hlbs:type.configuration.base`.

5.5.16.1. Attributes

Attribute Name	Description
default	xs:integer Default value of this configuration entry which is used if the value is not overridden by the application.
min?	xs:integer Minimal allowed value for this configuration value. If omitted, there is no lower limit..
max?	xs:integer Maximal allowed value for this configuration value. If omitted, there is no upper limit.

Table 5.70 type.configuration.integer Attributes

5.5.16.2. Elements

Element Name	Description
AllowedValue*	xs:integer A list of allowed values (OPTIONAL).

Table 5.71 type.configuration.integer Elements

5.5.16.3. XSD Definition

```

<xs:complexType name="type.configuration.integer">
<xs:complexContent>
  <xs:extension base="hlbs:type.configuration.base">
    <xs:sequence>
      <xs:element name="AllowedValue" type="xs:integer" minOccurs="0" maxOccurs="unbounded"/>
    </xs:sequence>
    <xs:attribute name="default" type="xs:integer" use="required"/>
    <xs:attribute name="min" type="xs:integer"/>
    <xs:attribute name="max" type="xs:integer"/>
  </xs:extension>
</xs:complexContent>
</xs:complexType>

```

5.5.17. type.configuration.string

A string configuration value. Derived from [hlbs:type.configuration.base](#).

5.5.17.1. Attributes

Attribute Name	Description
default	xs:string Default value of this configuration entry which is used if the value is not overridden by the application.

Table 5.72 type.configuration.string Attributes

5.5.17.2. Elements

Element Name	Description
AllowedValue*	xs:string A list of allowed values (OPTIONAL).

Table 5.73 type.configuration.string Elements

5.5.17.3. XSD Definition

```
<xs:complexType name="type.configuration.string">
<xs:complexContent>
  <xs:extension base="hlbs:type.configuration.base">
    <xs:sequence>
      <xs:element name="AllowedValue" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
    </xs:sequence>
    <xs:attribute name="default" type="xs:string" use="required"/>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

5.5.18. type.configuration.float

A float configuration value. Derived from `hlbs:type.configuration.base`.

5.5.18.1. Attributes

Attribute Name	Description
default	<code>xs:float</code> Default value of this configuration entry which is used if the value is not overridden by the application.
min?	<code>xs:float</code> Minimal allowed value for this configuration value. If omitted, there is no lower limit.
max?	<code>xs:float</code> Maximal allowed value for this configuration value. If omitted, there is no upper limit.

Table 5.74 type.configuration.float Attributes

5.5.18.2. Elements

Element Name	Description
AllowedValue*	<code>xs:float</code> A list of allowed values (OPTIONAL).

Table 5.75 type.configuration.float Elements

5.5.18.3. XSD Definition

```
<xs:complexType name="type.configuration.float">
<xs:complexContent>
  <xs:extension base="hlbs:type.configuration.base">
    <xs:sequence>
      <xs:element name="AllowedValue" type="xs:float" minOccurs="0" maxOccurs="unbounded"/>
    </xs:sequence>
    <xs:attribute name="default" type="xs:float" use="required"/>
    <xs:attribute name="min" type="xs:float"/>
    <xs:attribute name="max" type="xs:float"/>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

5.5.19. type.iso19794FingerImpressionType

An impression type as defined in [BIB_ISO_FINGER] (e.g. finger or palm). Derived from `xs:unsignedInt`.

5.5.19.1. Format Restrictions

The same restrictions as ▶Section 5.2.5 in apply.

5.5.19.2. XSD Definition

```
<xs:simpleType name="type.iso19794FingerImpressionType">
<xs:restriction base="xs:unsignedInt">
  <xs:pattern value="[0-9]|1[0-9]|2[0-9]"/>
</xs:restriction>
</xs:simpleType>
```

5.5.20. type.iso19794FingerCode

A code as defined in [BIB_ISO_FINGER] (e.g. finger or palm). Derived from `xs:unsignedInt`.

5.5.20.1. Format Restrictions

The same restrictions as in ▶Section 5.2.6 apply.

5.5.20.2. XSD Definition

```
<xs:simpleType name="type.iso19794FingerCode">
<xs:restriction base="xs:unsignedInt">
  <xs:pattern value="[0-9]|10|1[3-5]|2[0-9]|3[0-6]|4[0-9]|50"/>
</xs:restriction>
</xs:simpleType>
```

5.5.21. type.iso19794FaceImageType

A face image type as defined in [BIB_ISO_FACE]. Derived from `xs:unsignedInt`.

5.5.21.1. Format Restrictions

The same restrictions as in ▶Section 5.2.7 apply.

5.5.21.2. XSD Definition

```
<xs:simpleType name="type.iso19794FaceImageType">
<xs:restriction base="xs:unsignedInt">
  <xs:minInclusive value="0"/>
  <xs:maxInclusive value="255"/>
</xs:restriction>
</xs:simpleType>
```

5.5.22. type.iso19794IrisCode

A iris code as defined in [BIB_ISO_IRIS]. Derived from `xs:unsignedInt`.

5.5.22.1. Format Restrictions

The same restrictions as in ▶Section 5.2.8 apply.

5.5.22.2. XSD Definition

```
<xs:simpleType name="type.iso19794IrisCode">
<xs:restriction base="xs:unsignedInt">
  <xs:minInclusive value="0"/>
  <xs:maxInclusive value="2"/>
</xs:restriction>
</xs:simpleType>
```

5.5.23. type.biometricImpression

A biometric impression type.

5.5.23.1. Attributes

None.

5.5.23.2. Elements

One of the following elements:

Element Name	Description
FingerImpression	►hlbs:type.iso19794FingerImpressionType A finger impression type (may also contain a palm).

Table 5.76 type.biometricImpression Elements

5.5.23.3. XSD Definition

```
<xs:complexType name="type.biometricImpression">
<xs:choice>
  <xs:element name="FingerImpression" type="hlbs:type.iso19794FingerImpressionType"/>
</xs:choice>
</xs:complexType>
```

5.5.24. type.configuration.biometricImpression

A biometric impression type configuration value. Derived from ►hlbs:type.configuration.base .

5.5.24.1. Attributes

None.

5.5.24.2. Elements

Element Name	Description
Default	►hlbs:type.biometricImpression Default value of this configuration entry which is used if the value is not overriden by the application.
Allowed*	►hlbs:type.biometricImpression List of allowed values. If omitted, all values are allowed.

Table 5.77 type.configuration.biometricImpression Elements

5.5.24.3. XSD Definition

```
<xs:complexType name="type.configuration.biometricImpression">
<xs:complexContent>
  <xs:extension base="hlbs:type.configuration.base">
    <xs:sequence>

      <xs:element name="Default" type="hlbs:type.biometricImpression" minOccurs="1" maxOccurs="1"/>
      <xs:element name="Allowed" type="hlbs:type.biometricImpression" minOccurs="0"
maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

5.5.25. type.biometricCode

A biometric code.

5.5.25.1. Attributes

None.

5.5.25.2. Elements

One of the following elements:

Element Name	Description
FingerCode	►hlbs:type.iso19794FingerCode A finger code (may also contain a palm code).
FaceImageType	►hlbs:type.iso19794FaceImageType A face image type.
IrisCode	►hlbs:type.iso19794IrisCode An iris code.

Table 5.78 type.biometricCode Elements

5.5.25.3. XSD Definition

```
<xs:complexType name="type.biometricCode">
<xs:choice>
    <xs:element name="FingerCode" type="hlbs:type.iso19794FingerCode"/>
    <xs:element name="FaceImageType" type="hlbs:type.iso19794FaceImageType"/>
    <xs:element name="IrisCode" type="hlbs:type.iso19794IrisCode"/>
</xs:choice>
</xs:complexType>
```

5.5.26. type.configuration.biometricCode

A biometric code configuration value. Derived from ►hlbs:type.configuration.base .

5.5.26.1. Attributes

None.

5.5.26.2. Elements

Element Name	Description
Default	►hlbs:type.biometricCode Default value of this configuration entry which is used if the value is not overridden by the application.
Allowed*	►hlbs:type.biometricCode List of allowed values. If omitted, all values are allowed.

Table 5.79 type.configuration.biometricCode Elements

5.5.26.3. XSD Definition

```
<xs:complexType name="type.configuration.biometricCode">
<xs:complexContent>
    <xs:extension base="hlbs:type.configuration.base">
        <xs:sequence>
            <xs:element name="Default" type="hlbs:type.biometricCode" minOccurs="1" maxOccurs="1"/>
            <xs:element name="Allowed" type="hlbs:type.biometricCode" minOccurs="0" maxOccurs="unbounded"/>
        </xs:sequence>
    </xs:extension>
</xs:complexContent>
</xs:complexType>
```

```

    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>

```

5.5.27. type.configuration.biometricCodeList

A biometric code list configuration value. Derived from `>hlbs:type.configuration.base`.

5.5.27.1. Attributes

None.

5.5.27.2. Elements

Element Name	Description
Default*	<code>>hlbs:type.biometricCode</code> Default value of this configuration entry which is used if the value is not overridden by the application.

Table 5.80 type.configuration.biometricCodeList Elements

5.5.27.3. XSD Definition

```

<xs:complexType name="type.configuration.biometricCodeList">
  <xs:complexContent>
    <xs:extension base="hlbs:type.configuration.base">
      <xs:sequence>

        <xs:element name="Default" type="hlbs:type.biometricCode" minOccurs="0" maxOccurs="unbounded"/>
        </xs:sequence>
      </xs:extension>
    </xs:complexContent>
  </xs:complexType>

```

5.5.28. type.configuration.dataformat

A data format configuration value. Derived from `>hlbs:type.configuration.base`.

5.5.28.1. Attributes

Attribute Name	Description
default	<code>>hlbs:type.dataformat</code> Default value of this configuration entry which is used if the value is not overridden by the application.

Table 5.81 type.configuration.dataformat Attributes

5.5.28.2. Elements

Element Name	Description
AllowedValue*	<code>>hlbs:DataFormat</code> A list of allowed values (OPTIONAL).

Table 5.82 type.configuration.dataformat Elements

5.5.28.3. XSD Definition

```

<xs:complexType name="type.configuration.dataformat">
  <xs:complexContent>

```

```

<xs:extension base="hlbs:type.configuration.base">
  <xs:sequence>

    <xs:element name="AllowedValue" type="hlbs:type.dataformat" minOccurs="0" maxOccurs="unbounded"/>
  </xs:sequence>
  <xs:attribute name="default" type="hlbs:type.dataformat" use="required"/>
</xs:extension>
</xs:complexContent>
</xs:complexType>

```

5.5.29. type.dataformat

A data format. Derived from `xs:string`.

5.5.29.1. Values

No restrictions. For a list of currently supported formats see ▶Section 5.2.9.

5.5.29.2. XSD Definition

```

<xs:simpleType name="type.dataformat">
  <xs:restriction base="xs:string" />
</xs:simpleType>

```

5.5.30. type.configuration.image

An image configuration value. Derived from ▶`hlbs:type.configuration.base`.

5.5.30.1. Attributes

Attribute Name	Description
format	▶ <code>hlbs:type.dataformat</code> The REQUIRED dataformat of the image.

Table 5.83 type.configuration.image Attributes

5.5.30.2. Elements

None.

5.5.30.3. XSD Definition

```

<xs:complexType name="type.configuration.image">
<xs:complexContent>
  <xs:extension base="hlbs:type.configuration.base">
    <xs:attribute name="format" type="hlbs:type.dataformat" use="required"/>
  </xs:extension>
</xs:complexContent>
</xs:complexType>

```

5.5.31. type.configuration.binary

A binary configuration value. Derived from ▶`hlbs:type.configuration.base`.

5.5.31.1. Attributes

Attribute Name	Description
format	►hlbs:type.dataformat The REQUIRED dataformat of the binary data.

Table 5.84 type.configuration.binary Attributes

5.5.31.2. Elements

None.

5.5.31.3. XSD Definition

```
<xs:complexType name="type.configuration.binary">
<xs:complexContent>
  <xs:extension base="hlbs:type.configuration.base">
    <xs:attribute name="format" type="hlbs:type.dataformat" use="required"/>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

5.5.32. type.user.commands

Provides information about all possible user commands that can be send to the service.

5.5.32.1. Attributes

None.

5.5.32.2. Elements

Element Name	Description
UserCommand+	►hlbs:type.user.command A list of possible user commands.

Table 5.85 type.user.commands Elements

5.5.32.3. XSD Definition

```
<xs:complexType name="type.user.commands">
<xs:sequence>
  <xs:element name="UserCommand" type="hlbs:type.user.command" minOccurs="1" maxOccurs="unbounded"/>
</xs:sequence>
</xs:complexType>
```

5.5.33. type.user.command

A user command.

5.5.33.1. Attributes

Attribute Name	Description
id	xs:string The ID of the user command.

Attribute Name	Description
mandatory	xs:boolean If true, this user command SHALL be supported by the application because otherwise the service won't be able to work. Default: false

Table 5.86 type.user.command Attributes

5.5.33.2. Elements

Element Name	Description
Configuration*	►hlbs:type.configuration A list of configuration values allowed for this user command (if available).

Table 5.87 type.user.command Elements

5.5.33.3. XSD Definition

```

<xs:complexType name="type.user.command">
<xs:sequence>
  <xs:element name="Configuration" type="hlbs:type.configuration" minOccurs="0" maxOccurs="1"/>
</xs:sequence>
<xs:attribute name="id" type="xs:string" use="required" />
<xs:attribute name="mandatory" type="xs:boolean" default="false"/>
</xs:complexType>

```

5.5.34. type.feedback

Provides information about all possible feedback elements that can be provided by the service. The following table provides the mapping of feedback elements in the service description to the elements which SHALL be used in the SOAP-API feedback type defined in ►Section 5.2.23. There is no one-to-one mapping, because the elements in the description focus on their semantic meanings while the types in the SOAP API are reduced to the technical minimum.

Feedback-Element in Description	Feedback-Element in SOAP-API
Boolean	boolValue
Integer	intValue
Float	floatValue
FloatList	floatListValue
BiometricCode	biometricCodeValue
BiometricCodeList	biometricCodeListValue
Binary	binaryValue
Image	imageValue
ImageList	imageListValue
Progress	intValue
Icon	stringValue
Icons	stringListValue
Text	stringValue
XML	stringValue

Feedback-Element in Description	Feedback-Element in SOAP-API
Score	floatValue

Table 5.88 Feedback-Element Mapping

Icons and text SHALL be represented by Ids instead of binary data, because the service only defines the process and the application SHALL define the concrete look and feel and localisation.

5.5.34.1. Attributes

None.

5.5.34.2. Elements

A list of one or more of the following elements:

Element Name	Description
Boolean	►hlbs:type.feedback.boolean A boolean feedback element.
Integer	►hlbs:type.feedback.integer An integer feedback element.
Float	►hlbs:type.feedback.float An float feedback element.
FloatList	►hlbs:type.feedback.floatList An float list feedback element.
BiometricCode	►hlbs:type.feedback.biometricCode A biometric code feedback element.
BiometricCodeList	►hlbs:type.feedback.biometricCodeList A biometric code list feedback element.
Binary	►hlbs:type.feedback.binary A binary data feedback element.
Image	►hlbs:type.feedback.image An image feedback element.
ImageList	►hlbs:type.feedback.image An image list feedback element.
Progress	►hlbs:type.feedback.progress A progress feedback element.
Icon	►hlbs:type.feedback.icon An icon feedback element.
Icons	►hlbs:type.feedback.icons An icon list feedback element.
Text	►hlbs:type.feedback.text A text feedback element.
XML	►hlbs:type.feedback.xml An XML feedback element.
Score	►hlbs:type.feedback.score A score feedback element.

Table 5.89 type.feedback Elements

5.5.34.3. XSD Definition

```
<xs:complexType name="type.feedback">
```

```

<xs:choice minOccurs="1" maxOccurs="unbounded">
  <xs:element name="Boolean" type="hlbs:type.feedback.boolean" />
  <xs:element name="Integer" type="hlbs:type.feedback.integer" />
  <xs:element name="Float" type="hlbs:type.feedback.float" />
  <xs:element name="FloatList" type="hlbs:type.feedback.floatList" />
  <xs:element name="BiometricCode" type="hlbs:type.feedback.biometricCode" />
  <xs:element name="BiometricCodeList" type="hlbs:type.feedback.biometricCodeList" />
  <xs:element name="Binary" type="hlbs:type.feedback.binary" />
  <xs:element name="Image" type="hlbs:type.feedback.image" />
  <xs:element name="ImageList" type="hlbs:type.feedback.image" />
  <xs:element name="Progress" type="hlbs:type.feedback.progress" />
  <xs:element name="Icon" type="hlbs:type.feedback.icon" />
  <xs:element name="Icons" type="hlbs:type.feedback.icons" />
  <xs:element name="Text" type="hlbs:type.feedback.text" />
  <xs:element name="XML" type="hlbs:type.feedback.xml" />
  <xs:element name="Score" type="hlbs:type.feedback.score" />
</xs:choice>
</xs:complexType>

```

5.5.35. type.feedback.base

Base type that contains data which is shared among all feedback elements.

5.5.35.1. Attributes

Attribute Name	Description
id	xs:string The id of the feedback element.
mandatory?	xs:boolean If true, this feedback element SHALL be supported by the application because its display is considered critical for the process. Default: false

Table 5.90 type.feedback.base Attributes

5.5.35.2. Elements

Element Name	Description
Configuration?	►hlbs:type.configuration Possible configuration values for this feedback element (if available).

Table 5.91 type.feedback.base Elements

5.5.35.3. XSD Definition

```

<xs:complexType name="type.feedback.base">
  <xs:sequence>
    <xs:element name="Configuration" type="hlbs:type.configuration" minOccurs="0" maxOccurs="1"/>
  </xs:sequence>
  <xs:attribute name="id" type="xs:string" use="required" />
  <xs:attribute name="mandatory" type="xs:boolean" default="false"/>
</xs:complexType>

```

5.5.36. type.feedback.boolean

A boolean feedback element. Derived from ►hlbs:type.feedback.base .

5.5.36.1. Attributes

None.

5.5.36.2. Elements

None.

5.5.36.3. XSD Definition

```
<xs:complexType name="type.feedback.boolean">
<xs:complexContent>
  <xs:extension base="hlbs:type.feedback.base">
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

5.5.37. type.feedback.integer

An integer feedback element. Derived from `hlbs:type.feedback.base`.

5.5.37.1. Attributes

Attribute Name	Description
min?	<code>xs:int</code> Minimal possible returned value. If omitted, there is no lower limit.
max?	<code>xs:int</code> Maximal possible returned value. If omitted, there is no upper limit.

Table 5.92 type.feedback.integer Attributes

5.5.37.2. Elements

None.

5.5.37.3. XSD Definition

```
<xs:complexType name="type.feedback.integer">
<xs:complexContent>
  <xs:extension base="hlbs:type.feedback.base">
    <xs:attribute name="min" type="xs:int"/>
    <xs:attribute name="max" type="xs:int"/>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

5.5.38. type.feedback.float

A float feedback element. Derived from `hlbs:type.feedback.base`.

5.5.38.1. Attributes

Attribute Name	Description
min?	<code>xs:float</code> Minimal possible returned value. If omitted, there is no lower limit.
max?	<code>xs:float</code> Maximal possible returned value. If omitted, there is no upper limit.

Table 5.93 type.feedback.float Attributes

5.5.38.2. Elements

None.

5.5.38.3. XSD Definition

```
<xs:complexType name="type.feedback.float">
<xs:complexContent>
  <xs:extension base="hlbs:type.feedback.base">
    <xs:attribute name="min" type="xs:float"/>
    <xs:attribute name="max" type="xs:float"/>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

5.5.39. type.feedback.floatList

A float list feedback element. Derived from `►hlbs:type.feedback.base`.

5.5.39.1. Attributes

Attribute Name	Description
min?	<code>xs:float</code> Minimal possible returned value. If omitted, there is no lower limit.
max?	<code>xs:float</code> Maximal possible returned value. If omitted, there is no upper limit.

Table 5.94 type.feedback.floatList Attributes

5.5.39.2. Elements

None.

5.5.39.3. XSD Definition

```
<xs:complexType name="type.feedback.floatList">
<xs:complexContent>
  <xs:extension base="hlbs:type.feedback.base">
    <xs:attribute name="min" type="xs:float"/>
    <xs:attribute name="max" type="xs:float"/>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

5.5.40. type.feedback.biometricCode

A biometric code feedback element. Derived from `►hlbs:type.feedback.base`.

5.5.40.1. Attributes

None.

5.5.40.2. Elements

None.

5.5.40.3. XSD Definition

```
<xs:complexType name="type.feedback.biometricCode">
<xs:complexContent>
  <xs:extension base="hlbs:type.feedback.base">
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

5.5.41. type.feedback.biometricCodeList

A biometric code list feedback element. Derived from `>hlbs:type.feedback.base`.

5.5.41.1. Attributes

None.

5.5.41.2. Elements

None.

5.5.41.3. XSD Definition

```
<xss:complexType name="type.feedback.biometricCodeList">
<xss:complexContent>
  <xss:extension base="hlbs:type.feedback.base">
    </xss:extension>
  </xss:complexContent>
</xss:complexType>
```

5.5.42. type.feedback.binary

A binary data feedback element. Derived from `>hlbs:type.feedback.base`.

5.5.42.1. Attributes

Attribute Name	Description
format?	<code>>hlbs:type.dataformat</code> Format of the provided binary data.

Table 5.95 type.feedback.binary Attributes

5.5.42.2. Elements

None.

5.5.42.3. XSD Definition

```
<xss:complexType name="type.feedback.binary">
<xss:complexContent>
  <xss:extension base="hlbs:type.feedback.base">
    <xss:attribute name="format" type="hlbs:type.dataformat"/>
  </xss:extension>
</xss:complexContent>
</xss:complexType>
```

5.5.43. type.feedback.image

An image data feedback element. Derived from `>hlbs:type.feedback.base`.

5.5.43.1. Attributes

Attribute Name	Description
format?	<code>>hlbs:type.dataformat</code> Format of the provided image data.
width?	<code>xs:unsignedInt</code> Width of the provided image.

Attribute Name	Description
height?	xs:unsignedInt Height of the provided image.

Table 5.96 type.feedback.image Attributes

5.5.43.2. Elements

None.

5.5.43.3. XSD Definition

```
<xs:complexType name="type.feedback.image">
<xs:complexContent>
  <xs:extension base="hlbs:type.feedback.base">
    <xs:attribute name="format" type="hlbs:type.dataformat"/>
    <xs:attribute name="width" type="xs:unsignedInt"/>
    <xs:attribute name="height" type="xs:unsignedInt"/>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

5.5.44. type.feedback.progress

A progress feedback element. Derived from ▶hlbs:type.feedback.base .

5.5.44.1. Attributes

Attribute Name	Description
min?	xs:unsignedInt Minimal possible returned value. If omitted, there is no lower limit.
max?	xs:unsignedInt Maximal possible returned value. If omitted, there is no upper limit.

Table 5.97 type.feedback.progress Attributes

5.5.44.2. Elements

None.

5.5.44.3. XSD Definition

```
<xs:complexType name="type.feedback.progress">
<xs:complexContent>
  <xs:extension base="hlbs:type.feedback.base">
    <xs:attribute name="min" type="xs:unsignedInt" use="required"/>
    <xs:attribute name="max" type="xs:unsignedInt" use="required"/>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

5.5.45. type.feedback.icon

An icon feedback element. Derived from ▶hlbs:type.feedback.base .

5.5.45.1. Attributes

None.

5.5.45.2. Elements

Element Name	Description
PossibleValue*	xs:string Possible provided values for this feedback element.

Table 5.98 type.feedback.icon Elements

5.5.45.3. XSD Definition

```
<xs:complexType name="type.feedback.icon">
<xs:complexContent>
  <xs:extension base="hlbs:type.feedback.base">
    <xs:sequence>
      <xs:element name="PossibleValue" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

5.5.46. type.feedback.icons

An icon list feedback element. Derived from ▶hlbs:type.feedback.base .

5.5.46.1. Attributes

None.

5.5.46.2. Elements

Element Name	Description
PossibleValue*	xs:string Possible provided values for this feedback element.

Table 5.99 type.feedback.icons Elements

5.5.46.3. XSD Definition

```
<xs:complexType name="type.feedback.icons">
<xs:complexContent>
  <xs:extension base="hlbs:type.feedback.base">
    <xs:sequence>
      <xs:element name="PossibleValue" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

5.5.47. type.feedback.text

A text feedback element. Derived from ▶hlbs:type.feedback.base .

5.5.47.1. Attributes

None.

5.5.47.2. Elements

Element Name	Description
PossibleValue*	xs:string Possible provided values for this feedback element.

Table 5.100 type.feedback.text Elements

5.5.47.3. XSD Definition

```
<xs:complexType name="type.feedback.text">
<xs:complexContent>
  <xs:extension base="hlbs:type.feedback.base">
    <xs:sequence>
      <xs:element name="PossibleValue" type="xs:string" minOccurs="0" maxOccurs="unbounded"/>
    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

5.5.48. type.feedback.xml

An XML feedback element. Derived from `hlbs:type.feedback.base`.

5.5.48.1. Attributes

None.

5.5.48.2. Elements

None.

5.5.48.3. XSD Definition

```
<xs:complexType name="type.feedback.xml">
<xs:complexContent>
  <xs:extension base="hlbs:type.feedback.base">
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

5.5.49. type.feedback.score

A score feedback element. Derived from `hlbs:type.feedback.base`.

5.5.49.1. Attributes

Attribute Name	Description
min?	xs:float Minimal possible returned value. If omitted, there is no lower limit.
max?	xs:float Maximal possible returned value. If omitted, there is no upper limit.

Table 5.101 type.feedback.score Attributes

5.5.49.2. Elements

None.

5.5.49.3. XSD Definition

```
<xs:complexType name="type.feedback.score">
<xs:complexContent>
  <xs:extension base="hlbs:type.feedback.base">
    <xs:attribute name="min" type="xs:float"/>
    <xs:attribute name="max" type="xs:float"/>
  </xs:extension>
</xs:complexContent>
</xs:complexType>
```

6. Example (Non-Normative)

6.1. Service-Device Description

This section presents an example of a simple service-device-description.

```
<?xml version="1.0" encoding="utf-8"?>
<Service schemaVersion="1" xmlns="http://trbio.bsi.bund.de/hlbs/1">
  <Information>
    <Id>301678f1-6c9e-442d-827b-f3ba2cd67cba</Id>
    <Vendor>Example Vendor</Vendor>
    <Name>Capture Service</Name>
    <Version>1.1</Version>
    <Description>Generic Capture Service</Description>
    <Type>Enrolment</Type>
    <Device>
      <Id>979d3850-1e32-42ae-a209-1693675600ad</Id>
      <Vendor>Example Vendor</Vendor>
      <Name>Fingerprint Scanner</Name>
      <BiometricType>Finger</BiometricType>
    </Device>
  </Information>
```

This service can be used for enrolment and uses a fingerprint scanner.

```
<Configuration>
  <Integer id="TimeoutMs" default="0"/>
</Configuration>
```

One value that can be configured is the timeout after which the service execution automatically stops if nothing has been captured until then. The default value of 0 indicates by convention that the service normally doesn't automatically stop after a certain time.

```
<UserCommands>
  <UserCommand id="Cancel"/>
  <UserCommand id="ManualCapture"/>
</UserCommands>
```

During the execution of the service the commands "Cancel" and "ManualCapture" are allowed.

```
<FeedbackElements>
  <Image id="LiveImage">
    <Configuration>
      <DataFormat id="LiveImage.Format" default="bmp" modifiable="true" />
    </Configuration>
  </Image>
  <Text id="State">
    <PossibleValue>CAPTURE</PossibleValue>
    <PossibleValue>ERROR_CAPTURE_FAILED</PossibleValue>
  </Text>
</FeedbackElements>
```

The service provides live images via the feedback id "LiveImage". The format of the live image is "bmp" by default but this format can be changed by setting a different value for the configuration key "LiveImage.Format". Furthermore the service reports its state through a text element with id "State" which can be either "CAPTURE" or "ERROR_CAPTURE_FAILED".

```
<Results>
  <Image id="ResultImage">
    <Configuration>
      <DataFormat id="ResultImage.Format" default="bmp" modifiable="true" />
    </Configuration>
  </Image>
</Results>
</Service>
```

As result the service returns the captured image with format "bmp" by default. The result format can be changed by setting a value for the configuration key "ResultImage.Format".

7. Client-Server Connection Scenarios

Two connection scenarios exist regarding the connection between client and server. Both scenarios are introduced in the following sections. The logical architecture is depicted in ►Figure 7.1. Within this architecture the HLBS represents the interface between the middleware and the application with two physical connection scenarios described hereafter.

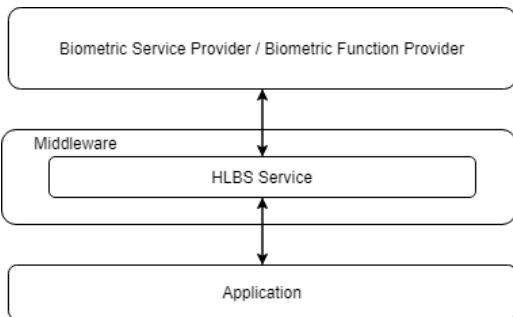


Figure 7.1. HLBS Architecture

7.1. Connection via TCP/IP

In the Transmission Control Protocol/Internet Protocol (TCP/IP) connection scenario the system that is using HLBS is one autarkic unit that is connected via an ethernet cable with the client computer. This architecture is also shown in ►Figure 7.2. Whether the connection is established directly or indirectly via one or multiple switches does not matter here. However, if the connection via TCP/IP is chosen, the following configuration SHALL be possible within the unit without the need of calling the ►configureService operation:

- customizable device name
- Dynamic Host Configuration Protocol (DHCP) and manual mode
- Internet Protocol Version 4 (IPv4) and Internet Protocol Version 6 (IPv6) configuration
- subnet configuration
- Transport Layer Security (TLS) 1.2 end-to-end encryption between client and server
- mutual client and server authentication
- customizable port on which the HLBS runs

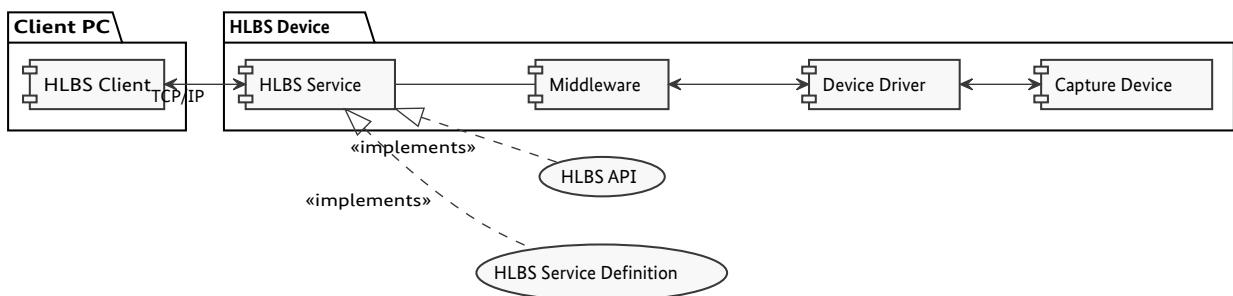


Figure 7.2. Architecture via TCP/IP

7.2. Connection via USB

In the Universal Serial Bus (USB) connection scenario the system that is using HLBS is split into two components. The first component is the actual unit which processes the request (e.g. acquisition of a facial image). This unit is connected via an USB-cable to the client computer where the second component of the system resides. The component on the client computer acts as a driver and implements the HLBS. This architecture is also shown in ▶Figure 7.3. The component on the client computer SHALL have support for configuring the port on which the HLBS runs without the need to call ▶configureService. The set port SHALL only be available as loopback interface.

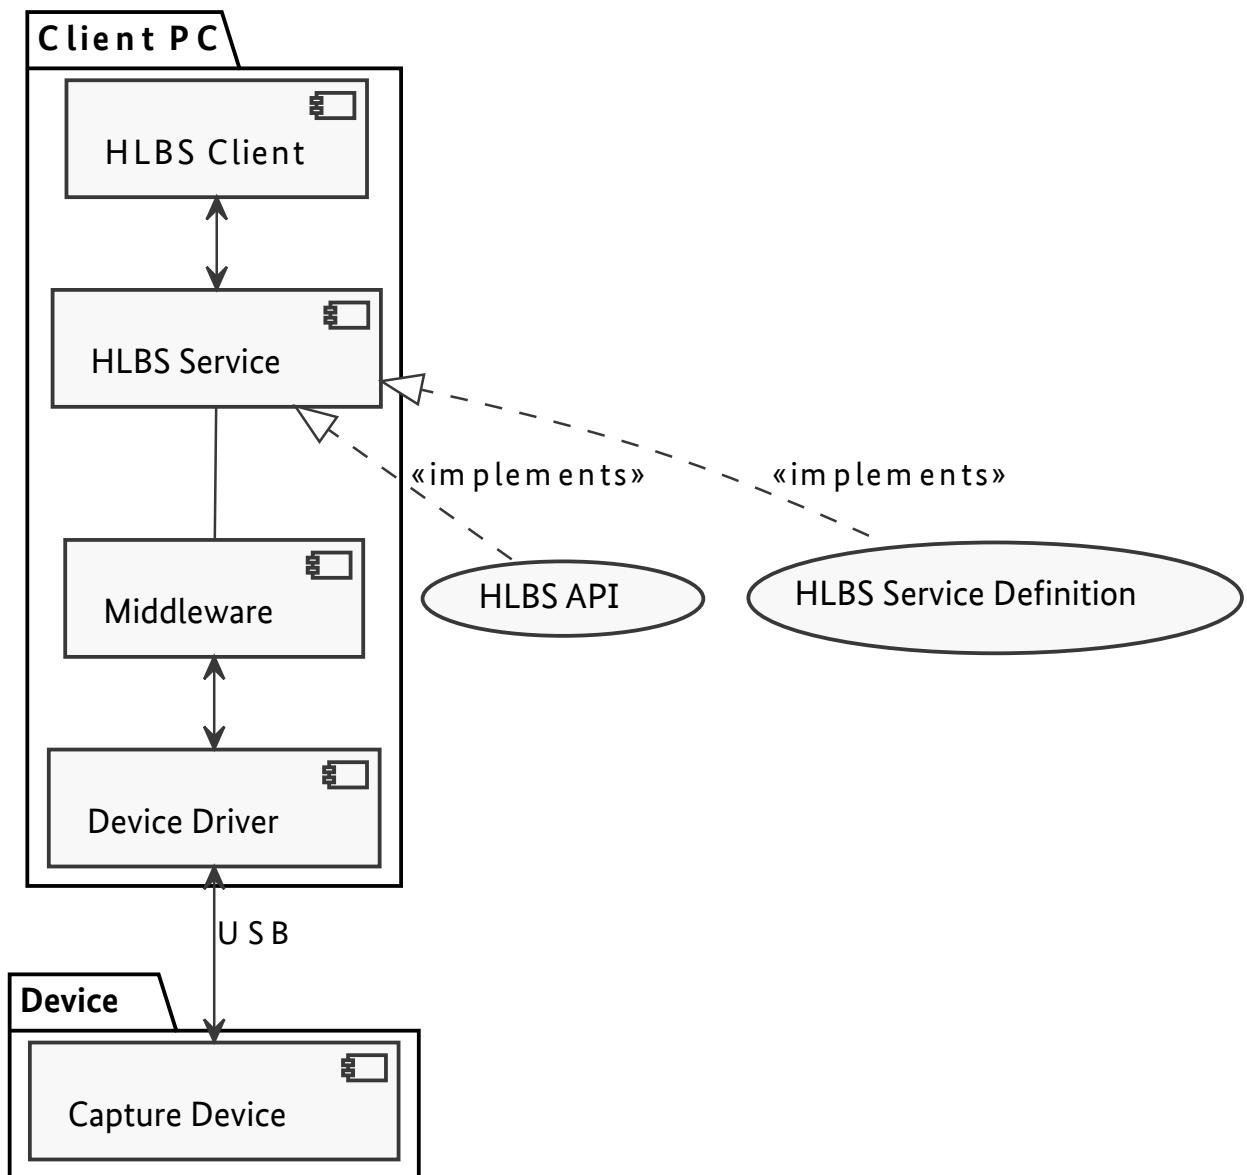


Figure 7.3. Architecture via USB

8. Service Definitions

Due to the generic structure of HLBS (e.g. support for custom user commands implemented by developers) it is necessary to define Service Definitions. These Service Definitions show different characteristics for each individual service including their minimum requirements.

8.1. Service Definition Facial Image Acquisition System

This Service Definition specifies requirements for a Facial Image Acquisition System (FIAS) that implements HLBS as communication interface.

There are two operation modes that SHALL be supported by the FIAS. These modes are the automated mode and the manual mode. Both modes SHALL be implemented within the following service definition.

8.1.1. ServiceInformation

When the `>getAllServices` operation is requested at least the `>ServiceInformation` shown in ▶Table 8.1 SHALL be returned. Further parameters are vendor specific and SHALL be set as well.

Parameter ID	Description	Type	Value
Id	Unique UUID of the service.	xsd: string	1411ad9f-58e6-4d3c- 816d-7fe9d7b67336
Name	Name of the service.	xsd: string	Facial Image Acquisition System

Table 8.1 FIAS ServiceInformation

8.1.2. Configuration

At least the configuration options listed in ▶Table 8.2 SHALL be available for the `>configureService` operation. These configuration options including their allowed and default values SHALL also be part of the `serviceDescriptionXML` that is returned with the `>getServiceDescription` operation.

Parameter ID	Description	Type	Possible Values
Purpose	The purpose of the facial image acquisition.	<code>>hlbs: ServiceType</code>	enrolment, identification, verification, other (e.g. purpose is ambiguous)
ApplicationProfile	Relevant Application Profile to be used for the acquisition process and its results.	<code>>hlbs: Application Profile</code>	Choice of the implemented Application Profiles (e.g. BCL_ManualBorderControl)

Parameter ID	Description	Type	Possible Values
InitialVerticalPosition	Sets the initial absolute vertical position of the camera's field of view. In case a multi camera solution is used, it SHALL NOT be possible to set the camera's field of view to a position where a merge image of two or more cameras is created.	xsd:float	Range: [0, ..., 1] Lowest position: 0 Middle position: 0.5 Highest position: 1
InitialIlluminationLevel	Sets the initial absolute illumination brightness.	xsd:float	Range: [0, ..., 1] Lowest position: 0 Middle position: 0.5 Highest position: 1
InitialOperationMode	Sets the operation mode that SHALL be used, once the service has been started.	xsd:string	automated, manual
TimeOut	Sets the timeout for acquisitions in milliseconds for the automated operation mode.	xsd:int	<i>Arbitrary Value</i> Default: 0 (no timeout)

Table 8.2 FIAS Configuration

8.1.3. User Commands

When the `>signalUserCommand` operation is executed the user commands shown in **Table 8.3** SHALL be supported in case the existence column is set to REQUIRED and MAY be supported in case the existence column is set to OPTIONAL. Conditional commands SHALL only be available if the manual operation mode is in use, except for the `CropManually`, `acceptImage` and `rejectImage` command. In case a user command is not allowed at a certain point of time during the execution of the service the user SHALL be informed via the `>getServiceFeedback` operation. The user commands of **Table 8.3** SHALL also be present within the `serviceDescriptionXML` that is returned with the `>getServiceDescription` operation.

Parameter ID	M/O/C ¹	Description	Type	Possible Values
Cancel	M	Abort/Terminate a running capture.		
Capture	M/C	Force capturing the currently showing camera's field of view. This overrules the result of a live-QA. This command SHALL only be usable when the live image is visible during the capture process.		
SwitchMode	M/C	Allows the switch between the manual and automated operation mode. This command SHALL only be usable when the live image is visible during the capture process.		

¹ Mandatory / Optional / Conditional

Parameter ID	M/O/C ¹	Description	Type	Possible Values
Trigger AutoFocus	C	Manual (anew) usage of the auto focus of the camera in order to focus a face positioned in front of the camera. This command SHALL only be available in manual mode.		
SetManual FocusPoint	C	Sets the focus of the camera's field of view to the given absolute focus distance in cm. This command SHALL only be available in manual mode.	xsd:float	Range: [40, ..., 100] Nearest focus: 40cm Farest focus: 100cm
TriggerAuto Height Adjustment	C	Manual (anew) usage of the auto height adjustment. The camera's field of view will be adjusted according to the body height of the traveler, so that the traveler's face is well-seen in the camera's field of view. This command SHALL only be available in manual mode.		
SetVertical Position	C	Sets the absolute vertical position of the camera's field of view. In case a multi camera solution is used, it SHALL NOT be possible to set the camera's field of view to a position where a merge image of two or more cameras is created. This command SHALL only be available in manual mode.	xsd:float	Range: [0, ..., 1] Lowest position: 0 Middle position: 0.5 Highest position: 1
Increment Vertical Position	C	Stepwise increment the vertical position of the camera's field of view by the defined value in cm, maximum to the highest position. In case a multi camera solution is used, it SHALL NOT be possible to set the camera's field of view to a position where a merge image of two or more cameras is created. This command SHALL only be available in manual mode.	xsd:int	<i>Arbitrary Value</i>

¹ Mandatory / Optional / Conditional

Parameter ID	M/O/C ¹	Description	Type	Possible Values
Decrement Vertical Position	C	Stepwise decrement the vertical position of the camera's field of view by the defined value in cm, maximum to the lowest position. In case a multi camera solution is used, it SHALL NOT be possible to set the camera's field of view to a position where a merge image of two or more cameras is created. This command SHALL only be available in manual mode.	xsd:int	Arbitrary Value
SetAbsolute Illumination Level	C	Set the absolute face illumination-brightness. This command SHALL only be available in manual mode.	xsd:float	Range: [0, ..., 1] Minimum brightness: 0 Middle brightness: 0.5 Maximum brightness: 1
Increment Illumination Level	C	Stepwise increment of the face illumination-brightness at the given proportion of the maximum brightness. This command SHALL only be available in manual mode.	xsd:float	Range: [0, ..., 1]
Decrement Illumination Level	C	Stepwise decrement of the face illumination-brightness at the given proportion of the maximum brightness. This command SHALL only be available in manual mode.	xsd:float	Range: [0, ..., 1]
CropManually	M/C	After capturing a facial image the operator SHALL have the option to crop the image manually. Thereby the automated cropping will be overruled. The command SHALL NOT be useable anytime else. The source of the image dimensions is the QAEntireImage feedback.	►hlbs: Image Region	The area to be cropped in is defined by the point of the upper left corner (x1, y1) and the point of the bottom right corner (x2, y2). Range x1 and x2: [0, ..., Image width in pixel] Range y1 and y2: [0, ..., Image height in pixel]
RotateManually	M/C	After capturing a facial image the operator SHALL have the option to rotate the image manually. Thereby the automated de-rotation will be overruled. The command SHALL NOT be useable anytime else. The rotation axis SHALL be the center of the QACroppedFacialImage.	xsd:float	Amount of clockwise rotation in degree within the range [0.0, ..., 360.0[, where 0.0 means no rotation.
AcceptImage	M/C	After capturing a facial image the operator SHALL have the option to accept the image using this command. The command SHALL NOT be useable anytime else.		

¹ Mandatory / Optional / Conditional

Parameter ID	M/O/C ¹	Description	Type	Possible Values
RejectImage	M/C	After capturing a facial image the operator SHALL have the option to reject the image using this command. The command SHALL NOT be useable anytime else. Note, that information about the acquisition of a rejected image SHALL still be part of a log. Only the record itself SHALL NOT be stored in the log anymore.		

Table 8.3 FIAS UserCommands

8.1.4. Feedback

When the `>getServiceFeedback` operation is executed the `feedbackElements` shown in ▶Table 8.4 SHALL be returned in case the existence column is set to REQUIRED and MAY be returned in case the existence column is set to OPTIONAL. Conditional feedback SHALL only be available if the manual operation mode is in use. Furthermore the `userCommands*` SHALL contain the `>hlbs:UserCommandInfo` for each implemented `>hlbs:UserCommand` that is currently allowed to be used. E.g. for the `>hlbs:UserCommand IncrementIlluminationLevel` the value `not-allowed` is to be returned if the maximum illumination-brightness is already reached. The possible `feedbackElements*` of ▶Table 8.4 SHALL also be part of the `serviceDescriptionXML` that is returned with the `>getServiceDescription`.

¹ Mandatory / Optional / Conditional

Parameter ID	M/O/C ²	Description	Type	Possible Values
LiveStatus	M	Transmission of status information of the FIAS during the running capture process for further processing within the client software.	xsd:string	Initializing (service initializes) SearchingFace (searching for face), FaceRecognized (face detected), Capturing (capture is running), StepBack (face is too close), StepForward (face is too far in the background), StepLeft (face is too far left), StepRight (face is too far right), MoveUp (face is too far down), MoveDown (face is too far up), StandStill (face is too much in movement), LookStraight (face is not facing frontal), OpenEyes (eyes are closed), CloseMouth (mouth is opened), MultipleFaces (multiple faces detected), PerformingQA (software-based QA is running), AssessQuality (operator is asked to accept or reject an acquired image)
LiveImage	M	Contains a live image of the constantly acquired live stream of the camera of the FIAS.	►hlbs:Image	<i>Image in a common data format (e.g. jpeg or bmp) is expected.</i>
LiveCropped FacialImage	M	As soon as a face is within the acquisition area of the FIAS, with this parameter a cropped facial image is transmitted.	►hlbs:Image	<i>Image in a common data format (e.g. jpeg or bmp) is expected.</i>
Current Focus Point	C	Returns the current absolute focus distance of the camera's field of view in cm. This feedback SHALL only be available in manual mode.	xsd:float	Range: [40, ..., 100]

² Mandatory / Optional / Conditional

Parameter ID	M/O/C ²	Description	Type	Possible Values
Current Vertical Position	C	Returns the current absolute vertical position of the camera's field of view. This feedback SHALL only be available in manual mode.	xsd: float	Range: [0, ..., 1]
Current Illumination Level	C	Returns the current absolute face illumination-brightness. This feedback SHALL only be available in manual mode.	xsd: float	Range: [0, ..., 1]
QAFeedback	M/C	Returns the Face-Feedback node of the TR-03121 XML Schema (see <code>hlbs4v7.xsd</code> for volumes BCL and IMA or <code>hlbs4v6.xsd</code> for volumes GID and ARE) containing all relevant quality information to assist the operator in his or her quality assessment. This feedback SHALL only be returned for the manual operator assessment after the FIAS has made a capture.	xsd: string	See TR-03121 XML Schema
QAEntire FacialImage	M/C	Returns the entire image that MAY be used for re-cropping the captured facial image. This feedback SHALL only be returned for the manual operator assessment after the FIAS has made a capture. The <code>>hlbs:ImageRegion</code> SHALL mark the image section of the <code>QACroppedFacialImage</code> .	►hlbs: Image	<i>Image in a common data format (e.g. jpeg or bmp) is expected.</i>
QACropped FacialImage	M/C	Returns the cropped image that shall be assessed by the operator. This feedback SHALL only be returned for the manual operator assessment after the FIAS has made a capture.	►hlbs: Image	<i>Image in a common data format (e.g. jpeg or bmp) is expected.</i>

² Mandatory / Optional / Conditional

Parameter ID	M/O/C ²	Description	Type	Possible Values
QACroppedFacialImageRotation	M/C	Returns the current rotation of the cropped image that shall be assessed by the operator. This feedback SHALL only be returned for the manual operator assessment after the Basic Facial Image Acquisition System has made a capture. It SHALL be updated in case the operator has changed the rotation manually.	xsd:float	Amount of clockwise rotation in degree within the range [0.0, ..., 360.0[, where 0.0 means no rotation.

Table 8.4 FIAS Feedback Elements

8.1.5. Results

The `>getResults` operation returns the `resultElements*` as `>hlbs:KeyValue`. The key-value pairs that SHALL be returned are shown in **Table 8.5**. The possible results of **Table 8.4** SHALL also be part of the `serviceDescriptionXML` that is returned with the `>getServiceDescription`.

Parameter ID	Description	Type	Possible Values
Result	Description of the result of the image acquisition.	xsd:string	Success (acquisition successful), Canceled (acquisition canceled), TimeOutWithImage (time out and image with insufficient quality captured), TimeOut WithoutImage (time out and no image captured), CameraFailure (camera failure)
FaceAcquisition	Contains the full XML root element <code>FaceAcquisition</code> (see TR-03121 XML, <code>biotypes4v7.xsd</code> for volumes BCL and IMA or <code>biotypes4v6.xsd</code> for volumes GID and ARE) which logs the entire acquisition process, including quality information and the finally accepted facial image as record. The data format, compression and file size of the record SHALL comply with the configured <code>ApplicationProfile</code> .	xsd:string	See TR-03121 XML Schema

Table 8.5 FIAS Result Elements

8.2. Service Definition Basic Facial Image Acquisition System

This Service Definition specifies requirements for a Facial Image Acquisition System with basic functionality (e.g. used for Supervised Facial Image Acquisition without Central Identity Register (CIR) Lookup) that implements HLBS as communication interface.

² Mandatory / Optional / Conditional

8.2.1. ServiceInformation

When the `>getAllServices` operation is requested at least the `>ServiceInformation` shown in ▶Table 8.6 SHALL be returned. Further parameters are vendor specific and SHALL be set as well.

Parameter ID	Description	Type	Value
Id	Unique UUID of the service.	xsd:string	ac9317c9-46d5-4925-80cf-0cb45d73ef3d
Name	Name of the service.	xsd:string	Basic Facial Image Acquisition System

Table 8.6 Basic Facial Image Acquisition System ServiceInformation

8.2.2. Configuration

At least the configuration options listed in ▶Table 8.7 SHALL be available for the `>configureService` operation. These configuration options including their allowed and default values SHALL also be part of the `serviceDescriptionXML` that is returned with the `>getServiceDescription` operation.

Parameter ID	Description	Type	Possible Values
Purpose	The purpose of the facial image acquisition.	►hlbs:ServiceType	enrolment, identification, verification, other (e.g. purpose is ambiguous)
ApplicationProfile	Relevant Application Profile to be used for the acquisition process and its results.	►hlbs:ApplicationProfile	Choice of the implemented Application Profiles (e.g. IMA_MultiModalProcess-ingImmigrationAuthoritiesEES)
TimeOut	Sets the timeout for acquisitions in milliseconds for the automated operation mode.	xsd:int	Arbitrary Value Default:0 (no timeout)

Table 8.7 Basic Facial Image Acquisition System Configuration

8.2.3. User Commands

When the `>signalUserCommand` operation is executed the user commands shown in ▶Table 8.8 SHALL be supported in case the existence column is set to REQUIRED and MAY be supported in case the existence column is set to OPTIONAL. Conditional commands SHALL only be available if the manual operation mode is in use, except for the `CropManually`, `acceptImage` and `rejectImage` command. In case a user command is not allowed at a certain point of time during the execution of the service the user SHALL be informed via the `>getServiceFeedback` operation. The user commands of ▶Table 8.8 SHALL also be present within the `serviceDescriptionXML` that is returned with the `>getServiceDescription` operation.

Parameter ID	M/O/C ³	Description	Type	Possible Values
Cancel	M	Abort/Terminate a running capture.		

³ Mandatory / Optional / Conditional

Parameter ID	M/O/C ³	Description	Type	Possible Values
Capture	M/C	Force capturing the currently showing camera's field of view. This overrules the result of a live-QA. This command SHALL only be usable when the live image is visible during the capture process.		
CropManually	M/C	After capturing a facial image the operator SHALL have the option to crop the image manually. Thereby the automated cropping will be overruled. The command SHALL NOT be usable anytime else. The source of the image dimensions is the <code>QAEntireImage</code> feedback.	►hlbs: Image Region	The area to be cropped in is defined by the point of the upper left corner ($x1, y1$) and the point of the bottom right corner ($x2, y2$). Range $x1$ and $x2$: [0, ... , <i>Image width in pixel</i>] Range $y1$ and $y2$: [0, ... , <i>Image height in pixel</i>]
RotateManually	M/C	After capturing a facial image the operator SHALL have the option to rotate the image manually. Thereby the automated de-rotation will be overruled. The command SHALL NOT be usable anytime else. The rotation axis SHALL be the center of the <code>QACroppedFacialImage</code> .	xsd:float	Amount of clockwise rotation in degree within the range [0 . 0, ... , 360 . 0], where 0 . 0 means no rotation.
AcceptImage	M/C	After capturing a facial image the operator SHALL have the option to accept the image using this command. The command SHALL NOT be usable anytime else.		
RejectImage	M/C	After capturing a facial image the operator SHALL have the option to reject the image using this command. The command SHALL NOT be usable anytime else. Note, that information about the acquisition of a rejected image SHALL still be part of a log. Only the record itself SHALL NOT be stored in the log anymore.		

Table 8.8 Basic Facial Image Acquisition System UserCommands

8.2.4. Feedback

When the `►getServiceFeedback` operation is executed the `feedbackElements` shown in ►Table 8.9 SHALL be returned in case the existence column is set to REQUIRED and MAY be returned in case the existence column is set to OPTIONAL. Conditional feedback SHALL only be available if the manual operation mode is in use. Furthermore the `userCommands*` SHALL contain the `►hlbs:UserCommandInfo` for each implemented `►hlbs:UserCommand` that is currently allowed to be used. E.g. for the `►hlbs:UserCommand IncrementIlluminationLevel` the value `not-allowed` is to be returned if the maximum illumination-brightness is already reached. The

³ Mandatory / Optional / Conditional

possible `feedbackElements*` of ▶Table 8.9 SHALL also be part of the `serviceDescriptionXML` that is returned with the ▶`getServiceDescription`.

Parameter ID	M/O/C ⁴	Description	Type	Possible Values
LiveStatus	M	Transmission of status information of the Basic Facial Image Acquisition System during the running capture process for further processing within the client software.	xsd:string	Initializing (service initializes) SearchingFace (searching for face), FaceRecognized (face detected), Capturing (capture is running), StepBack (face is too close), StepForward (face is too far in the background), StepLeft (face is too far left), StepRight (face is too far right), MoveUp (face is too far down), MoveDown (face is too far up), StandStill (face is too much in movement), LookStraight (face is not facing frontal), OpenEyes (eyes are closed), CloseMouth (mouth is opened), MultipleFaces (multiple faces detected), PerformingQA (software-based QA is running), AssessQuality (operator is asked to accept or reject an acquired image)
LiveImage	M	Contains a live image of the constantly acquired live stream of the camera of the Basic Facial Image Acquisition System.	▶hlbs:Image	<i>Image in a common data format (e.g. jpeg or bmp) is expected.</i>
LiveCropped FacialImage	M	As soon as a face is within the acquisition area of the Basic Facial Image Acquisition System, with this parameter a cropped facial image is transmitted.	▶hlbs:Image	<i>Image in a common data format (e.g. jpeg or bmp) is expected.</i>

⁴ Mandatory / Optional / Conditional

Parameter ID	M/O/C ⁴	Description	Type	Possible Values
QAFeedback	M/C	Returns the Face-Feedback node of the TR-03121 XML Schema (see <code>hlbs-s4v7.xsd</code> for volumes BCL and IMA or <code>hlbs4v6.xsd</code> for volumes GID and ARE) containing all relevant quality information to assist the operator in his or her quality assessment. This feedback SHALL only be returned for the manual operator assessment after the Basic Facial Image Acquisition System has made a capture.	xsd:string	See TR-03121 XML Schema
QAEntireFacialImage	M/C	Returns the entire image that MAY be used for re-cropping the captured facial image. This feedback SHALL only be returned for the manual operator assessment after the Basic Facial Image Acquisition System has made a capture. The <code>►hlbs:ImageRegion</code> SHALL mark the image section of the <code>QACroppedFacialImage</code> .	►hlbs:Image	<i>Image in a common data format (e.g. jpeg or bmp) is expected.</i>
QACroppedFacialImage	M/C	Returns the cropped image that shall be assessed by the operator. This feedback SHALL only be returned for the manual operator assessment after the Basic Facial Image Acquisition System has made a capture. It SHALL be updated in case the operator has changed the cropping or rotation manually.	►hlbs:Image	<i>Image in a common data format (e.g. jpeg or bmp) is expected.</i>

⁴ Mandatory / Optional / Conditional

Parameter ID	M/O/C ⁴	Description	Type	Possible Values
QACropped FacialImage Rotation	M/C	Returns the current rotation of the cropped image that shall be assessed by the operator. This feedback SHALL only be returned for the manual operator assessment after the Basic Facial Image Acquisition System has made a capture. It SHALL be updated in case the operator has changed the rotation manually.	xsd:float	Amount of clockwise rotation in degree within the range [0.0, ..., 360.0[, where 0.0 means no rotation.

Table 8.9 Basic Facial Image Acquisition System Feedback Elements

8.2.5. Results

The `>getResults` operation returns the `resultElements*` as `>hlbs:KeyValue`. The key-value pairs that SHALL be returned are shown in **Table 8.10**. The possible results of **Table 8.9** SHALL also be part of the `serviceDescriptionXML` that is returned with the `>getServiceDescription`.

Parameter ID	Description	Type	Possible Values
Result	Description of the result of the image acquisition.	xsd:string	Success (acquisition successful), Canceled (acquisition canceled), TimeOutWithImage (time out and image with insufficient quality captured), TimeOut Without Image (time out and no image captured), CameraFailure (camera failure)
FaceAcquisition	Contains the full XML root element <code>FaceAcquisition</code> (see TR-03121 XML, <code>biotypes4v7.xsd</code> for volumes BCL and IMA or <code>biotypes4v6.xsd</code> for volumes GID and ARE) which logs the entire acquisition process, including quality information and the finally accepted facial image as record. The data format, compression and file size of the record SHALL comply with the configured ApplicationProfile.	xsd:string	See TR-03121 XML Schema

Table 8.10 Basic Facial Image Acquisition System Result Elements

8.3. Service Definition Fingerprint Acquisition

This service definition specifies requirements for a system acquiring fingerprints.

⁴ Mandatory / Optional / Conditional

8.3.1. ServiceInformation

When the `>getAllServices` operation is requested at least the `>hlbs:ServiceInformation` shown in ▶Table 8.11 SHALL be returned. Further parameters are vendor specific and SHALL be set as well.

Parameter ID	Description	Type	Value
Id	Unique UUID of the service.	xsd:string	186266e5-3760-4d0c-b7ec-b866024e6b61
Name	Name of the service.	xsd:string	Fingerprint Acquisition

Table 8.11 Fingerprint Acquisition ServiceInformation

8.3.2. Configuration

At least the configuration options listed in ▶Table 8.12 SHALL be available for the `>configureService` operation. These configuration options including their allowed and default values SHALL also be part of the `serviceDescriptionXML` that is returned with the `>getServiceDescription` operation.

Parameter ID	Description	Type	Possible Values
Purpose	The purpose of the fingerprint image acquisition.	<code>>hlbs:ServiceType</code>	enrolment,identification, verification
ApplicationProfile	Relevant Application Profile to be used for the acquisition process and its results.	<code>>hlbs:ApplicationProfile</code>	
FingerprintsToAcquire	Fingerprints/slaps that shall be acquired.	<code>>hlbs:BiometricCodeList</code>	Codes for fingerprints (see <code>>hlbs:Iso19794FingerCode</code>).
MissingFingers	Reports (temporary) missing fingers that can not be acquired, but have been requested to acquire.	xsd:string	<code>FingerMissingList</code> (see TR-03121 XML, <code>hlbs1v1.xsd</code>) is used.
SlapClassifier	Configures whether the slap classification shall be performed or not. This SHALL only have effect when a slap acquisition is performed (see <code>FingerprintsToAcquire</code>).	xsd:string	activated (default), deactivated, evaluation (classification is only performed for internal evaluation purposes)

Table 8.12 Fingerprint Acquisition Configuration

8.3.3. User Commands

When the `>signalUserCommand` operation is executed the user commands shown in ▶Table 8.13 SHALL be supported by the service. In case a user command is not allowed at a certain point of time during the execution of the service the user SHALL be informed via the `>getServiceFeedback` operation. The user commands of ▶Table 8.13 SHALL also be present within the `serviceDescriptionXML` that is returned with the `>getServiceDescription` operation.

Parameter ID	Description
Cancel	Abort/Terminate the running service. Command SHALL be executable at any time.
Continue	Continue with the next capture or finalise the overall capture process after the last fingerprint has been captured. The command SHALL be executable when the intermediate result image is shown.

Parameter ID	Description
Discard	Reject the last capture (namely the intermediate result image) and start the capture process for it anew. The command SHALL be executable when the intermediate result image is shown.
DiscardAll	Reject all previous captures and start the overall capture process anew. The command SHALL be executable when the intermediate result image is shown.
UseSingleFingerAcquisitionFallback	In case a biometric subject is not capable to place the fingers of a slap on the fingerprint scanner this command may be used to activate the fallback acquisition of single fingers for this slap.

Table 8.13 Fingerprint Acquisition UserCommands

8.3.4. Feedback

Within the `>hlbs:Feedback` the `feedbackElements*` of **Table 8.14** as `>hlbs:KeyValue` SHALL be returned. Furthermore the `userCommands*` SHALL contain the `>hlbs:UserCommandInfo` for each implemented `>hlbs:UserCommand`. The possible `feedbackElements*` of **Table 8.14** SHALL also be part of the `serviceDescriptionXML` that is returned with the `>getServiceDescription`.

Parameter ID	M/O/C ⁵	Description	Type	Possible Values
LiveStatus	O	Transmission of status information during the continuous capture process (live view) for further processing within the client software.	xsd:string	Initializing (service initializes) SearchingFingers (searching for fingers), FingersRecognized (fingers detected), Capturing (capture is running), ReduceFingerPressure (fingers are placed with too much pressure), RaiseFingerPressure (fingers are placed with too less pressure or are placed partly in the air), MoveFingersLeft (fingers are too far right), MoveFingersRight (fingers are too far left), MoveFingersForward (fingers are too far back), MoveFingersBackward (fingers are too far ahead), KeepFingersStill (fingers are too much in movement), PerformingQA (software-based QA is running), AssessQuality (operator is asked to accept or reject an acquired image)

⁵ Mandatory / Optional / Conditional

Parameter ID	M/O/C ⁵	Description	Type	Possible Values
ExpectedFingers	M	Indicates which finger(s) are expected to be captured for the current capture round.	►hlbs: Iso19794 FingerCode	<i>One of codes for fingerprints.</i>
LiveImage	O	Contains a live image of the constantly acquired live stream of the fingerprint scanner.	►hlbs: Image	<i>Image in a common data format (e.g. jpeg or bmp) is expected.</i>
Intermediate FingerAmount Mismatch	O	There is a problem with the amount of fingers that have been captured with the last intermediate finger-print image.	xsd: string	TooLessFingers Captured (less fingers than expected have been captured), TooManyFingers Captured (more fingers than expected have been captured)
Intermediate Fingerprint Images	M	Contains the finger-prints (segmented) that have been acquired last.	►hlbs: ImageList	<i>Image in a common data format (e.g. jpeg or bmp) is expected.</i>
Intermediate FingerCodes	M	Denotes the finger code of each returned intermediate finger-print image.	►hlbs: Biometric CodeList	The order of the ►hlbs: Iso19794FingerCode elements in this list has to be the same as in the previous list of Intermediate Fingerprint Images
Intermediate SlapImage	O	In case the acquisition is a slap acquisition, the slap image of the last capture SHALL be contained here.	►hlbs: Image	<i>Image in a common data format (e.g. jpeg or bmp) is expected.</i>
Intermediate FingerFeedback	M	Returns the Finger-Feedback node of the TR-03121 XML Schema (see hlb-s4v7.xsd for volumes BCL and IMA or hlb-s4v6.xsd for volumes GID and ARE) containing all relevant quality, PAD and uniqueness information to assist the operator in his or her quality assessment. This feedback SHALL only be returned for the manual operator assessment after a finger capture has been made.	xsd: string	See TR-03121 XML Schema

Table 8.14 Fingerprint Acquisition Feedback Elements⁵ Mandatory / Optional / Conditional

8.3.5. Results

The `>getResults` operation returns the `resultElements*` as `>hlbs:KeyValue`. The key-value pairs that SHALL be returned are shown in ▶Table 8.15. The possible results of ▶Table 8.14 SHALL also be part of the `serviceDescriptionXML` that is returned with the `>getServiceDescription`.

Parameter ID	Description	Type	Possible Values
Result	Description of the result of the fingerprint image acquisition.	xsd:string	Success (acquisition successful), Canceled (acquisition canceled)
FingerAcquisition	Contains the full XML root element <code>Finger-Acquisition</code> (see TR-03121 XML, <code>biotype-s4v7.xsd</code> for volumes BCL and IMA or <code>biotypes4v6.xsd</code> for volumes GID and ARE), which logs the entire acquisition process, information about quality, PAD and uniqueness as well as the finally accepted fingerprint(s) as record(s). The data format, compression and file size of the record SHALL comply with the configured <code>ApplicationProfile</code> .	xsd:string	See TR-03121 XML Schema

Table 8.15 Fingerprint Acquisition Result Elements

8.4. Service Definition for Self-Service System

In this section HLBS service definitions are given that are used for external evaluation of biometric acquisition components within self-service systems (SSSs) individually without executing the entire SSS process. The service definitions stated below mirrors feedback that is shown to the biometric subject in front of the SSS and returns a result that would also be returned in productive mode. Currently, this service definition is only intended for the BCL volume of this technical guideline.

8.4.1. Automated Acquisition of Slap Fingerprints

8.4.1.1. ServiceInformation

When the `>getAllServices` operation is requested at least the `>hlbs:ServiceInformation` shown in ▶Table 8.16 SHALL be returned. Further parameters are vendor specific and SHALL be set as well.

Parameter ID	Description	Type	Value
Id	Unique UUID of the service.	xsd:string	eb299a2a-00e6-4e3d-a569-d1e4cf2e8fa
Name	Name of the service.	xsd:string	Automated Acquisition Slap Fingerprints SSS

Table 8.16 Automated Acquisition of Slap Fingerprints ServiceInformation

8.4.1.2. Configuration

At least the configuration options listed in ▶Table 8.17 SHALL be available for the `>configureService` operation. These configuration options including their allowed and default values SHALL also be part of the `serviceDescriptionXML` that is returned with the `>getServiceDescription` operation.

Parameter ID	M/O ⁶	Description	Type	Possible Values
Purpose	M	The purpose of the finger-print image acquisition.	►hlbs:ServiceType	enrolment, verification
RequestSlaps	M	Request the acquisition of the right and/or left hand slap.	►hlbs:BiometricCodeList	►hlbs:Iso19794FingerCode 13 and/or 14 is expected within the list.
TimeoutMs	M	Maximum time in ms after which the acquisition process will abort, in case no fingerprints have been acquired.	xsd:int	Arbitrary value (default: 0)
SlapClassifier	M	Configures whether the slap classification shall be performed or not. This SHALL only have effect when a slap acquisition is performed (see FingerprintsToAcquire).	xsd:string	activated (default), deactivated, evaluation (classification is only performed for internal evaluation purposes)

Table 8.17 Automated Acquisition of Slap Fingerprints Configuration

8.4.1.3. User Commands

When the ►signalUserCommand operation is executed the user commands shown in ►Table 8.18 SHALL be supported by the service. In case a user command is not allowed at a certain point of time during the execution of the service the user SHALL be informed via the ►getServiceFeedback operation. The user commands of ►Table 8.18 SHALL also be present within the serviceDescriptionXML that is returned with the ►getServiceDescription operation.

Parameter ID	Description
Cancel	Abort/Terminate the running service. Command SHALL be executable at any time.

Table 8.18 Automated Acquisition of Slap Fingerprints UserCommands

8.4.1.4. Feedback

Within the ►hlbs:Feedback the feedbackElements* of ►Table 8.19 as ►hlbs:KeyValue SHALL be returned. Furthermore the userCommands* SHALL contain the ►hlbs:UserCommandInfo for each implemented ►hlbs:UserCommand . The possible feedbackElements* of ►Table 8.19 SHALL also be part of the serviceDescriptionXML that is returned with the ►getServiceDescription .

Parameter ID	M/O ⁷	Description	Type	Possible Values
ExpectedSlap	M	Indicates which slap is currently expected to be captured.	►hlbs:Iso19794FingerCode	13 or 14

⁶ Mandatory / Optional

⁷ Mandatory / Optional

Parameter ID	M/O ⁷	Description	Type	Possible Values
LiveInformation	M	Transmission of status information during the continuous capture process (live view) for further processing within the client software.	xsd:string	Initializing (service initializes), SearchingSlap (searching for slap), SlapRecognized (slap detected), Capturing (capture is running), ReduceSlapPressure (slap is placed with too much pressure), RaiseSlapPressure (slap is placed with too less pressure or is placed partly in the air), MoveSlapLeft (slap is too far right), MoveSlapRight (slap is too far left), MoveSlapForward (slap is too far back), MoveSlapBackward (slap is too far ahead), KeepStill (fingers are too much in movement)
LiveFingerprintImage	O	Contains a live image of the constantly acquired live stream of the fingerprint scanner.	►hlbs:Image	<i>Image in a common data format (e.g. jpeg or bmp) is expected.</i>
LiveEnvironmentSurveillanceImage	O	Contains a live image of the constantly acquired live stream of the environment surveillance camera.	►hlbs:Image	<i>Image in a common data format (e.g. jpeg or bmp) is expected.</i>
LiveFingerprintScannerSurveillanceImage	O	Contains a live image of the constantly acquired live stream of the fingerprint scanner surveillance camera.	►hlbs:Image	<i>Image in a common data format (e.g. jpeg or bmp) is expected.</i>

Table 8.19 Automated Acquisition of Slap Fingerprints Feedback Elements

8.4.1.5. Results

The `►getResults` operation returns the `resultElements*` as `►hlbs:KeyValue`. The key-value pairs that SHALL be returned are shown in ►Table 8.20. The possible results of ►Table 8.19 SHALL also be part of the `serviceDescriptionXML` that is returned with the `►getServiceDescription`.

⁷ Mandatory / Optional

Parameter ID	M/O ⁸	Description	Type	Possible Values
Result	M	Description of the result of the fingerprint image acquisition.	xsd:string	Success (acquisition successful), Canceled (acquisition canceled), Timeout (acquisition aborted by system due to timeout), BiometricSubject Disappeared (acquisition aborted by system due to disappearance of biometric subject), FingerAmount Mismatch (acquisition failed due to finger amount mismatch for final slap image)
FingerAcquisition	M	Contains the full XML root element FingerAcquisition (see TR-03121 XML, biotypes4v7.xsd for volumes BCL and IMA or biotypes4v6.xsd for volumes GID and ARE) with all relevant information about the process including its results as records. The requirements of the SSS Application Profile of the BCL Volume of this technical guideline apply.	xsd:string	See TR-03121 XML Schema

Table 8.20 Automated Acquisition of Slap Fingerprints Result Elements

8.4.2. Automated Acquisition of Facial Images

8.4.2.1. ServiceInformation

When the `►getAllServices` operation is requested at least the `►hlbs:ServiceInformation` shown in Table 8.21 SHALL be returned. Further parameters are vendor specific and SHALL be set as well.

Parameter ID	Description	Type	Value
Id	Unique UUID of the service.	xsd:string	457b3255-568b-43ab-b63c-ccd-d120dalfa
Name	Name of the service.	xsd:string	Automated Acquisition Facial Images SSS

Table 8.21 Automated Acquisition of Facial Images ServiceInformation

⁸ Mandatory / Optional

8.4.2.2. Configuration

At least the configuration options listed in ▶Table 8.22 SHALL be available for the ▶configureService operation. These configuration options including their allowed and default values SHALL also be part of the serviceDescriptionXML that is returned with the ▶getServiceDescription operation.

Parameter ID	M/O ⁹	Description	Type	Possible Values
Purpose	M	The purpose of the facial image acquisition.	▶hlbs:ServiceType	enrolment, verification
TimeoutMs	M	Maximum time in ms after which the acquisition process will abort, in case no facial images have been acquired.	xsd:int	Arbitrary value (default: 0)

Table 8.22 Automated Acquisition of Facial Images Configuration

8.4.2.3. User Commands

When the ▶signalUserCommand operation is executed the user commands shown in ▶Table 8.23 SHALL be supported by the service. In case a user command is not allowed at a certain point of time during the execution of the service the user SHALL be informed via the ▶getServiceFeedback operation. The user commands of ▶Table 8.23 SHALL also be present within the serviceDescriptionXML that is returned with the ▶getServiceDescription operation.

Parameter ID	Description
Cancel	Abort/Terminate the running service. Command SHALL be executable at any time.

Table 8.23 Automated Acquisition of Facial Images UserCommands

8.4.2.4. Feedback

Within the ▶hlbs:Feedback the feedbackElements* of ▶Table 8.24 as ▶hlbs:KeyValue SHALL be returned. Furthermore the userCommands* SHALL contain the ▶hlbs:UserCommandInfo for each implemented ▶hlbs:UserCommand . The possible feedbackElements* of ▶Table 8.24 SHALL also be part of the serviceDescriptionXML that is returned with the ▶getServiceDescription .

⁹ Mandatory / Optional

Parameter ID	M/O ¹⁰	Description	Type	Possible Values
LiveInformation	M	Transmission of status information during the continuous capture process (live view) for further processing within the client software.	xsd:string	Initializing (service initializes), SearchingFace (searching for face), FaceRecognized (face detected), Capturing (capture is running), StepBack (face is too close), StepForward (face is too far in the background), MoveLeft (face is too far right), MoveRight (face is too far left), MoveUp (face is too far down), MoveDown (face is too far up), StandStill (face is too much in movement), LookStraight (face is not facing frontal), OpenEyes (eyes are closed), CloseMouth (mouth is opened), MultipleFaces (multiple faces detected)
LiveFacialImage	O	Contains a live image of the constantly acquired live stream of the facial image camera.	►hlbs:Image	<i>Image in a common data format (e.g. jpeg or bmp) is expected.</i>

Table 8.24 Automated Acquisition of Facial Images Feedback Elements

8.4.2.5. Results

The ►getResults operation returns the resultElements* as ►hlbs:KeyValue . The key-value pairs that SHALL be returned are shown in ►Table 8.25. The possible results of ►Table 8.24 SHALL also be part of the serviceDescriptionXML that is returned with the ►getServiceDescription .

¹⁰ Mandatory / Optional

Parameter ID	M/O ¹¹	Description	Type	Possible Values
Result	M	Description of the result of the facial image acquisition.	xsd:string	Success (acquisition successful), Canceled (acquisition canceled), Timeout (acquisition aborted by system due to timeout), BiometricSubject Disappeared (acquisition aborted by system due to disappearance of biometric subject)
FaceAcquisition	M	Contains the full XML root element FaceAcquisition (see TR-03121 XML, biotypes4v7.xsd for volumes BCL and IMA or biotypes4v6.xsd for volumes GID and ARE) with all relevant information about the process including its results as records. The requirements of the SSS Application Profile of the BCL Volume of this technical guideline apply.	xsd:string	See TR-03121 XML Schema

Table 8.25 Automated Acquisition of Facial Images Result Elements¹¹ Mandatory / Optional

List of Abbreviations

Abbreviation	Description
API	Application Programming Interface
BioAPI	Biometric Application Programming Interface
BSP	Biometric Service Provider
CIR	Central Identity Register
DHCP	Dynamic Host Configuration Protocol
FIAS	Facial Image Acquisition System
GUI	graphical user interface
HLBS	High Level Biometric Services
IPv4	Internet Protocol Version 4
IPv6	Internet Protocol Version 6
SOAP	Simple Object Access Protocol
SSS	self-service system
TCP/IP	Transmission Control Protocol/Internet Protocol
TLS	Transport Layer Security
UI	User Interface
USB	Universal Serial Bus

Bibliography

[BIB_ISO_FACE] ISO/IEC 19794-5:2005 "Information technology - Biometric data interchange formats – Part 5: Face image data".

[BIB_ISO_FINGER] ISO/IEC 19794-4:2005 "Information technology - Biometric data interchange formats – Part 4: Finger image data".

[BIB_ISO_IRIS] ISO/IEC 19794-6:2005 "Information technology - Biometric data interchange formats - Part 6: Iris image data".

[BIB_ISO_MINUTIAE] ISO/IEC 19794-2:2005 "Information technology - Biometric data interchange formats – Part 2: Finger minutiae data".

[BIB_RFC2119] RFC 2119: Key words for use in RFCs to Indicate Requirement Levels.